


CARTRIDGE

308 Winchester 125 grain

Version 7.0

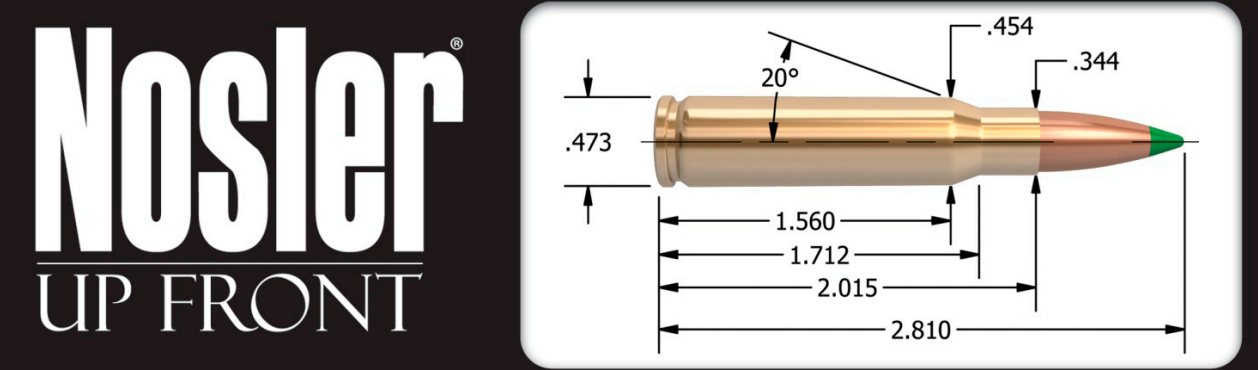

BULLET:		MAXIMUM S.A.A.M.I. O.A.C.L.		2.810"
		TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	125gr. Spitzer	2.810"	0.366	0.188
Ballistic Tip®	125gr. Spitzer	2.810"	0.366	0.188

CASE TYPE:	Nosler		PRIMER TYPE	Fed 210M
CASE HOLDS:	51.5	Gr. WATER	BARREL Length/Make	24" Lilja
			BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
H335	46.5 * MAX.	2990		92%
	44.5	2870		88%
	42.5	2750		84%
IMR 4895	45.5 * MAX.	3010		97%
	43.5	2840		93%
	41.5	2670		89%
IMR 4320	48.0 * MAX.	3048		100%
	46.0	2883		96%
	44.0	2718		92%
RL7	41.5 * MAX.	3088		88%
	39.5	2953		83%
	37.5	2818		79%
Viht N135	46.5 * MAX.	3088	**	105%
	44.5	2979		100%
	42.5	2870		96%
Varget	50.0 * MAX.	3128	**	105%
	48.0	3039	**	101%
	46.0	2863		97%
A-2460	48.0 MAX.	3150		94%
	46.0	3040		90%
	44.0 *	2930		86%
Viht N140	49.5 * MAX.	3155	**	112%
	47.5	3045	**	107%
	45.5	2934	**	103%
W748 Most Accurate Powder Tested	51.5 * MAX.	3214	**	104%
	49.5	3143		100%
	47.5	3073		96%
TAC	50.0 MAX.	3284		99%
	48.0 *	3173		95%
	46.0	3061		91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

\* = Most accurate load tested  
\*\* = Compressed load