


A soldier in a ghillie suit is shown from the back, holding a Remington rifle. The soldier is wearing a camouflage uniform and tan gloves. The rifle is a modern assault rifle with a black and tan finish, featuring a scope and a magazine. The background is a rocky, desert-like terrain.

Remington[®]

DEFENSE

NEW! XM2010 SNIPER WEAPON SYSTEM


Systematically eliminating all variables. The M24 is based on the legendary Model 700™ and 40-X™ rifles. Its unmatched accuracy and reliability have made it the standard in long-range tactical situations, and our Sniper Weapon Systems make outfitting your operation as efficient and as simple as possible. From the basic M24 Sniper System – the standard for the U.S. Army since 1988 – to the advanced XM2010 package, we include the world-famous rifle and all the premium, service-proven components you need. Remington was awarded the U.S. Army Enhanced Sniper Rifle (ESR) contract in September 2010 to reconfigure up to 3,600 M24 Sniper Weapon Systems after a full and open competition.



FOLDING STOCK » Folded
Remington Arms Chassis System
captures the bolt handle securely for
airborne operations.

XM2010 SNIPER WEAPON SYSTEMS

Designed as an upgrade to the venerable M24 SWS, the XM2010 comes configured with the Remington® Arms Chassis System (RACS). The XM2010 gives the sniper greater capability, lethality and flexibility offered by the 300 Winchester Magnum round, a detachable box magazine, a Leupold variable powered optic, full rail systems for mounting of ancillary equipment and signature reduction in the form of an AAC TiTAN QD suppressor.

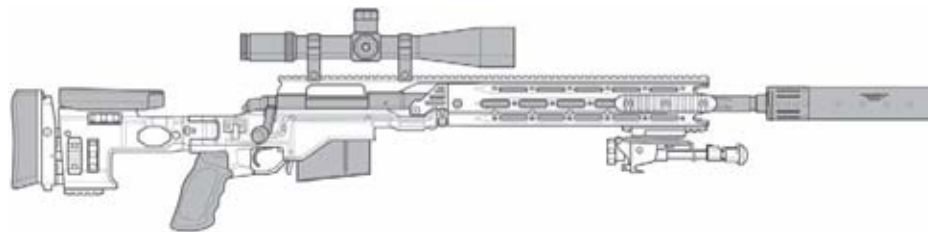

XM2010 Sniper Weapon System
RACS Configuration



M24 SNIPER WEAPON SYSTEM » 24" 7.62 cold-hammer-forged 5R Rifling 416 stainless steel barrel • 1:11.25 twist • Composite aramid fiber-reinforced stock with aluminum bedding block • 5 round internal magazine • Leupold® Mark 4 M3 10x day optic • Steel rings and 2-piece base • Target-style iron sights • Deployment kit and hard case



M24 Sniper Weapon System
(Order #25679)



The M24 Sniper Weapon System comes complete with everything you could want in a Hardigg hard case – Leupold® Mark 4 M3 day optic, OK Weber competition iron sights, deployment kit which includes spare parts and tools, cleaning kit, scope hard case, weapon soft case and system hard case. Includes bipod, sling and user manual.

Remington®

www.remingtondefense.com

NEW! REMINGTON GAS PISTON™ (RGP™) UPPER RECEIVER

Built to address perceived shortfalls of currently fielded NATO systems, the RGP is an upgrade solution to extend the lifecycle of the M-16 family for decades to come. Currently chambered in 5.56mm NATO with a hammer-forged, Melonite-converted barrel for extended life, the RGP is a monolithic upper receiver capable of dropping in on M-4/M-16 series lower receivers without modification. Built around a revolutionary gas piston operating system, the user can fire suppressed and unsuppressed without a regulator and realize significant durability, reliability and maintainability advantages over gas impingement offerings. The handguard offers patent-pending features common to the Remington Defense family of firearms, including cable routing guides, removable rail pieces and 45-degree offsets. The entire package is topped off by an AAC BLACKOUT™ flash hider to virtually eliminate visual signature, day or night.



AMBIDEXTROUS CHARGING HANDLE »

CAN INTEGRATE WITH ANY
EXISTING M4 MILSPEC LOWER »

CONFIGURATION SHOWN »
14.5" 5.56mm barrel



FULLY MODULAR DESIGN » The RGP is a mission-configurable system capable of barrel change from 10.5" to 14.5" in less than five minutes with user level tools

- The gas system is accessed in less than a minute without tools for ease of maintenance.



BARREL » Available in 10.5" and 14.5" medium or heavy profile • Single tool change in less than five minutes

MOUNTING SURFACE » Free-float tube design allows for eight planes of accessory rail mounting • Features ventilation for rapid cooling, a unique cable management system and removable rail sections



RAIL SYSTEM » Available in five different configurations:

- Four Position
- Three Position
- Two Position
- One Position
- One Position Low Profile

MONOLITHIC UPPER » Single piece forged 7075 aerospace-grade aluminum



BARREL CHANGE » Barrel is easily mounted via a barrel nut plate that attaches to the upper receiver via torque hex screws



GAS PISTON SYSTEM » The RGP is a nonregulated gas piston system capable of suppressed and unsuppressed fire without a gas setting change and cleans easily from the front without tools • Optimized for use with the AAC RGP-SD

Remington®

www.remingtondefense.com

MODULAR SNIPER RIFLE (MSR™)

A new level of surgical precision. Designed for operators, by operators. The Remington® Modular Sniper Rifle (MSR™) combines lethal accuracy at 1500 meters with a user-adjustable folding stock, free-float handguard, and the potential to change barrel lengths and calibers within minutes at the user level from 338 Lapua Magnum to 338 Norma Magnum to 300 Winchester Magnum to 7.62mm NATO. This patent-pending system addresses long- and medium-range needs of the modern battlefield in one package designed to meet multiple emerging U.S. Armed Forces requirements. The MSR™ is mission-adaptable with just a change of a bolt face, barrel and magazine, and features lightweight, efficient design and optimal material selection for performance and corrosion resistance – this system truly never has to leave the battlefield.



FOLDING STOCK » The right-folding stock features a bi-directional locking mechanism to minimize the overall system profile • Length of pull is user-adjustable • Cheekpiece is adjust-able for height and fore/aft position • Height of butt-plate is vertically adjustable

ACTION » TriNyte® coated components are impervious to corrosion • Receiver features titanium alloy with steel-on-steel lock-up in the barrel extension • Ambidextrous bolt release

FIRE CONTROL » The MSR uses the same combat-proven M24 SWS trigger enhanced with the latest anti-corrosion resistant coatings and with user adjustment feature removed. The trigger is set at a pull weight of 3 to 5 lbs. +/- 8 oz.


GRIP » Any AR-style grip can be accommodated

MAGAZINE » 5, 7, and 10 round Teflon® coated center feed single to double stack magazines for positive feeding • Removable insert to allow greater than standard overall cartridge lengths • Magazines are available in 338 Lapua Magnum (5 round and 10 round), 338 Norma Magnum (5 round and 10 round), 300 Winchester Magnum (7 round), and 7.62mm NATO (10 round)


FIELD BALLISTICS COMPARISONS

- | | |
|---|--|
| ◆ 338 Lapua Mag.
– 300 OTM@2750
(27 in. barrel) | ◆ 300 Win. Mag.
– 190 SMK@3000
(27 in. barrel) |
| ◆ 338 Lapua Mag.
– 300 OTM@2600
(20 in. barrel) | ◆ 300 Win. Mag.
– 190 SMK@2750
(20 in. barrel) |
| ◆ 338 Lapua Mag.
– 250 OTM@2900
(27 in. barrel) | ◆ 7.62mm NATO
– 175 SMK@2650
(27 in. barrel) |
| ◆ 338 Lapua Mag.
– 250 OTM@2700
(20 in. barrel) | ◆ 7.62mm NATO
– 175 SMK@2575
(20 in. barrel) |

ENERGY COMPARISON

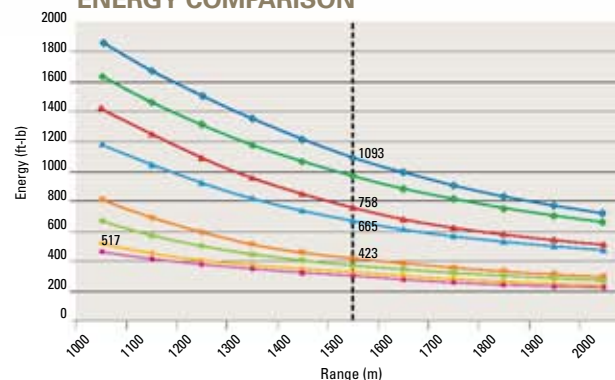

VELOCITY COMPARISON

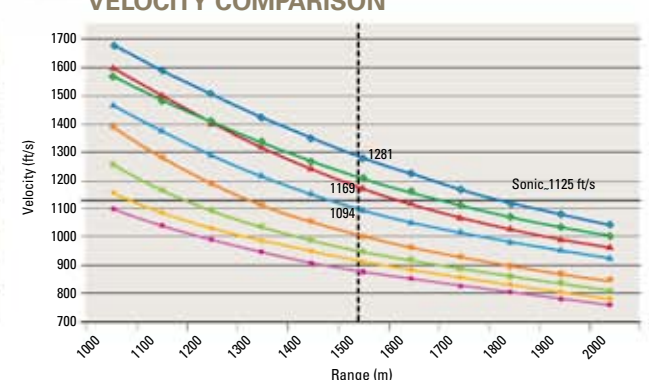



FOLDING STOCK » Bolt capture when folded prevents bolt loss during transport



ACCESSORIES » Tested with all military approved sights, lights, night vision devices and suppressors to ensure shock mitigation and zero retention • Removable rail pieces ensure the right accessories can be attached in the right places



PRIMARY RAIL » Monolithic, MIL-STD 1913 rail available in 20, 30, and 40 MOA options, allowing a variety of day/night optics to be mounted on the same plane • Integral recoil lug distributes the load from the rail and scope evenly • Optics mounting platform is compatible with HORUS reticle equipped optics, ballistic software, PDA interfaces, night vision devices and thermal imaging devices

REMOVABLE HANDGUARD » Octagonal free-float tube design allows for eight planes of accessory rail mounting • Each accessory rail features integral recoil lugs to optimally distribute accessory loads during recoil • MSR features multiple sling attachment points, ventilation for rapid cooling, a unique cable management system, and a flat bottom for increased stability while firing

SUPPRESSOR » Customer specified suppressor and muzzle brake (AAC Titan™ recommended – eliminates 98% of muzzle flash, reduces recoil by 60%, 24.25 ounces, 9.5" long – extends 8.8" past the muzzle, 136-137 Db, POI shift <1MOA)



10 round magazine

5 round magazine



BARREL » Available in 20", 22", 24" and 27" • Match grade, fluted to minimize weight and optimize heat dissipation without compromising stiffness



24" barrel



27" barrel



CALIBER » Caliber is convertible in minutes at the operator level from 338 Lapua Magnum to 338 Norma Magnum to 300 Winchester Magnum to 7.62mm NATO (with a magazine block for training or field expedient use) • Other magnum calibers available upon request

338 Lapua Magnum

300 Winchester Magnum

7.62mm NATO



Remington®

www.remingtondefense.com

ADAPTIVE COMBAT RIFLE (ACR™)

One rifle. Many missions. The revolutionary, fully-modular Remington® Adaptive Combat Rifle (ACR™). The ACR™ was initially conceived to provide today's warfighter an American-made, reliable, accurate and mission-configurable rifle. Three American companies – MagPul Industries Corp., Bushmaster® and Remington® – shared this common vision, and after multiple iterations of torturous testing only the strongest materials, components and concepts survived. The ACR™ can change calibers from 5.56mm to 6.8mm in minutes at the user level by changing the bolt head, barrel and magazine. The ACR™ can also change barrels, stocks and accessories to go from a close-quarters battle platform to a designated marksman platform. Add a superbly reliable gas piston operating system, controllable full-auto fire capability, a non-reciprocating bolt handle, a monolithic free-floating rail system and intuitive, ambidextrous controls, and you have a platform that is a natural fit for any operator and gives him all the options he needs. Made in the USA for government sales by the oldest name in firearms and ammunition – Remington® delivers again.



STOCK » Removable 6-position positive-stop adjustable stock with a length of pull from 11"-14" • Positive detent allows firing when stock is fully folded • Half-inch rise in adjustable cheekpiece • Watertight internal storage • Rubber butt-pad • Fixed and precision stocks also available

CONFIGURATION SHOWN » 14.5" 5.56mm barrel with front and rear battle sights and AAC suppressor

BOLT ASSEMBLY » Multi-cal bolt assembly quickly and easily changes from 5.56 NATO to 6.8mm • Forward-mounted charging handle can be switched within seconds from left to right side of the upper receiver and is non-reciprocating during firing

AMBIDEXTROUS FEATURES » Ambidextrous magazine release, safety mechanism, selector lever and bolt release/hold open

LOWER RECEIVER » High-impact composite lower with textured magazine well and modular grip storage



Folding stock



Fixed stock



Multiple lower receivers offered



Multi-cal. bolt carrier



7000 Series aluminum receiver



5-side handguard with removable rail pieces



Tri-rail handguard



10.5" barrel



14.5" barrel



16.5" barrel

FULLY MODULAR DESIGN » All major components are configurable to user preference • Barrel, stock and bolt are all interchangeable in less than two minutes



ACCESSORIES » Tested with all military approved sights, lights, night vision devices and suppressors to ensure shock mitigation and zero retention • Integral forward, rear and single-point sling mounts



RAIL » Free-floating MIL-STD-1913 monolithic rail

OPERATING SYSTEM » Adjustable, piston-driven gas system supported by hardened internal bearing rails

BARREL » Tool-less quick change barrel system. Available in 10.5", 14.5" and 16.5"

SUPPRESSOR/FLASH HIDER » Optimized with AAC suppressor (17.1 ounces, 6.625" long – extends 5.1" past the muzzle • 132-136 Db w/M855 ball, repeatable POI shift) and Blackout flash hider



Folded

STOCK POSITION OPTIONS »



Standard Position – 11"

Fully extended – 14"

MAGAZINE » Accepts all M16 series magazines to include MagPul PMAG



Mud



Salt-Fog



Cold



Sand-Dust

ENDURANCE TESTING » Multiple grueling endurance tests confirmed MIL-STD environments, barrel life, accuracy and reliability to a multiple of current U.S. Army standards for the M4 Carbine



Remington®

www.remingtondefense.com

MODEL 870™ MCS™ SHOTGUN SYSTEM

Honing the leading edge. The ability to adapt to the constantly evolving urban battlefield has become a necessary trait of all government agencies. The 870™ Modular Combat System (MCS™) was built with this fact in mind. Our focus remains on building the most solid and dependable tactical weapons available today.



MODEL 870™ MODULAR COMBAT SYSTEM (MCS™) » Multiple specialized tactical shotguns in one, the Model 870™ Modular Combat System (MCS™) is the ultimate choice for virtually any close-range scenario • Modifications are made rapidly without tools thanks to the REM™ LOC Quick-Change Stock System, truly a revolutionary design for professionals who need to adapt on the fly



MULTIPLE SHOTGUNS IN ONE

Breaching shotgun with 10" barrel with cylinder choke, pistol grip only, and 4 shell capacity • Close-Quarter Combat (CQB) shotgun with 14" barrel and choke tubes, pistol grip stock, and 6 shell capacity • Shotgun with 18" barrel and choke tubes, pistol grip stock, and 7-shell capacity • Accessory rail for optics • V-Tac MK1 sling included • Comes with cleaning rod (also acts as a magazine spring guide when assembling) • Two detachable shell carriers



LED light in white or red for illuminating ballistic breach site



Alternate attachment system (optional)



Model 870™ MCS™ breaching shotgun with 10" barrel (Order #24973)

MODEL 870™ BREACHER

Extremely compact and built on the most trusted pump action of all time, the Model 870™ MCS™ breaching shotgun features a 10" cylinder bore-breaching barrel and a Pachmayr® pistol grip for efficiency and control • 3-shot tube magazine capacity, plus one in the chamber with an overall length of 20 ¼"



Model 870™ MCS™ CQB
shotgun with 14" barrel
(Order #24973)



SHOTGUN RETENTION DEVICE »

Designed for use with any Remington® tactical shotgun, this device secures your weapon on a belt, body armor and a variety of hard surfaces using a degree of friction that can be adjusted to suit your needs • It's completely ambidextrous and constructed of rugged Kydex for reliability



Remington®

www.remingtondefense.com


MODEL 700P™ POLICE BOLT-ACTION RIFLES

No window too narrow. When lives are at stake, precision at the moment of opportunity is everything. Precisely why Remington® rifles are the No. 1 choice in the line of duty. The world-renowned accuracy of our Model 700™ rifles will make you the master of any long-range tactical situation. When the safety of others rests in your hands, one of these should too.



MODEL 700P™

For those who can accept nothing less than perfection, there is no other choice • The Model 700P™ is the epitome of shot-to-shot consistency and field-proven reliability • It features a receiver machined from ordnance-grade steel flawlessly bedded in your stock • Choose a heavy-contour, 26" barrel or the agile 20" fluted barrel (LTR only) • Both are free-floated • All rifles feature a tough, non-glare, Parkerized finish for concealment

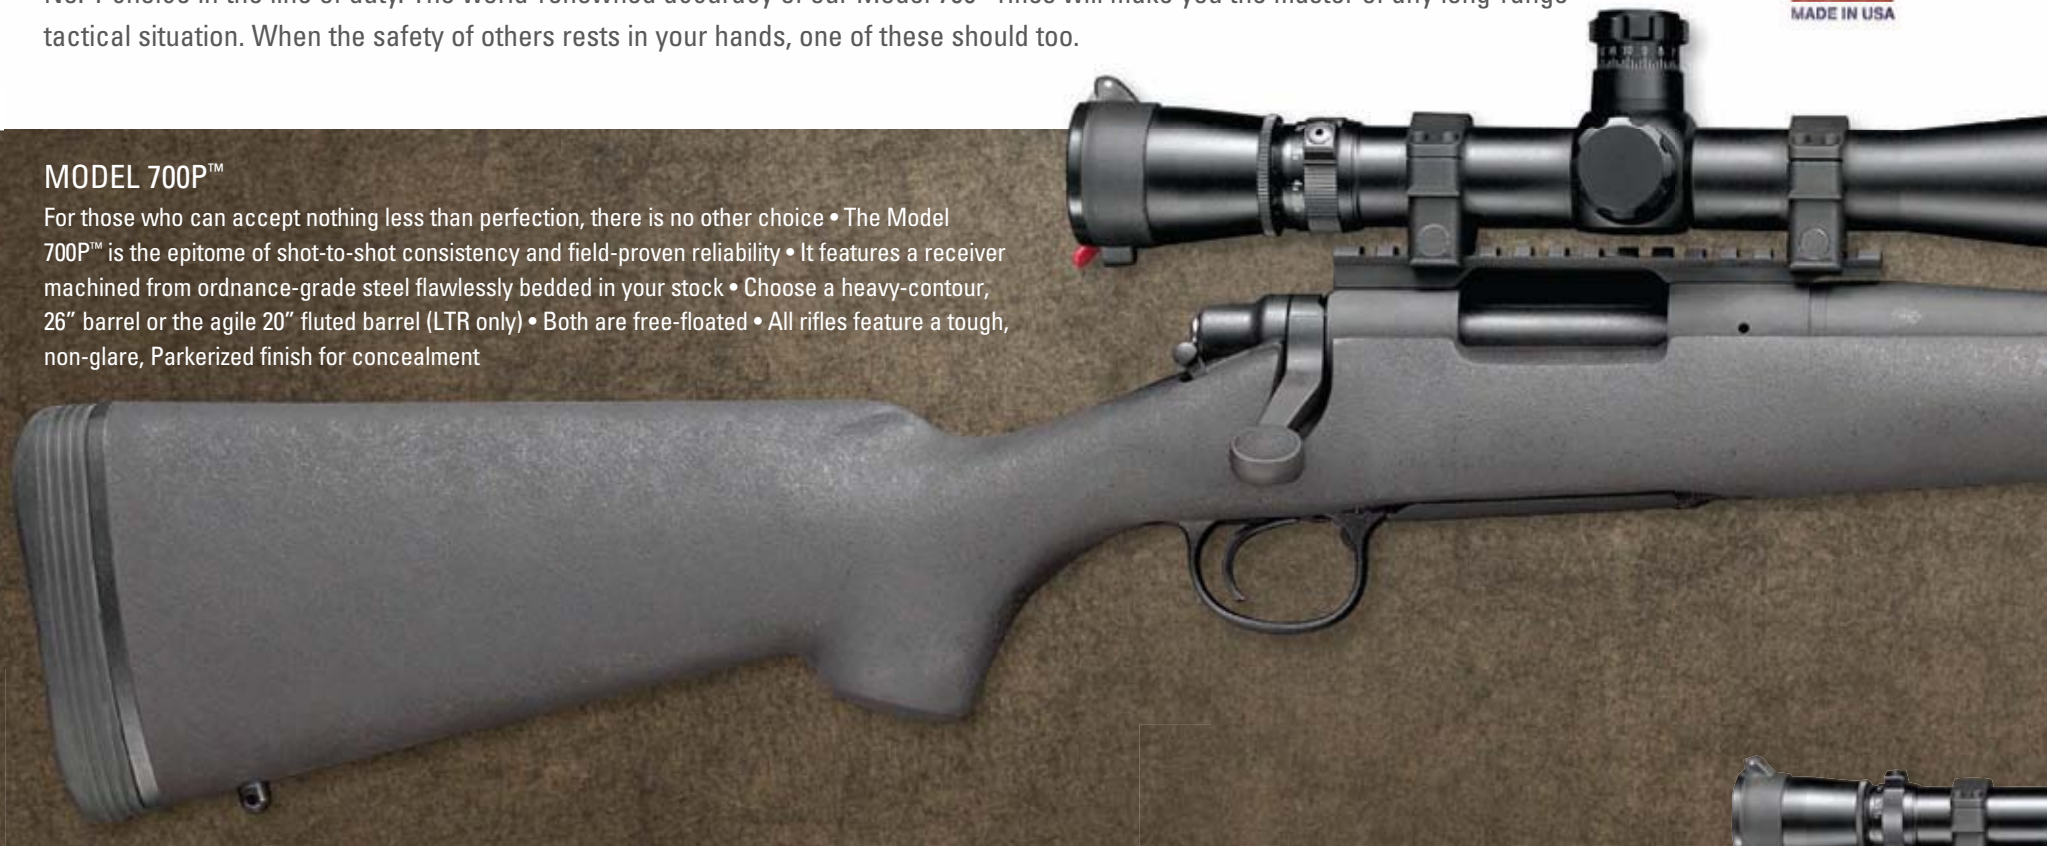

Legendary Model 700™ action • Receiver machined from ordnance-grade steel • Drilled and tapped for scope mounts • Three overlapping rings of solid steel (bolt face, barrel and receiver) • Heavy, free-floating 26" barrel (20" fluted barrel on LTR) • Composite stock features with aircraft-grade aluminum bedding block • Non-reflective finish • Sling swivel studs • Magazine with hinged floor plate • Chambered in 223 Remington, 7mm Remington Mag., 308 Win., 300 Win. Mag. and 300 Remington Ultra Mag. • LTR chambered in 223 Remington, 308 Win., and 300 Remington SA Ultra Mag.





Model 700P™ LTR™
Light Tactical Rifle
(Order #25635)
(308 Win. caliber)

MODEL 700P™ USR™ (URBAN SNIPER RIFLE) » The USR™ is designed for the modern day operator who needs advanced capabilities to perform his mission • The USR™ is the pinnacle of Model 700™ tactical rifle development • It begins with the superb Model 700™ LTR™, then adds essential tactical components such as a detachable box magazine, MARS rail, variable power optics, adjustable stock, muzzle brake, optional sound suppressor and bipod



Model 700P™ USR™
Shown with optional suppressor
and Harris® bipod
(Order #86450)
(308 Win. caliber/rifle only)

700™ LTR™ action and barrel • Fully adjustable, aramid fiber-reinforced stock with aluminum bedding block • Leupold® 3.5-10x Mark 4 M3 LR/T day scope • MOA Modular Accessory Rail System with side Picatinny rails • Badger Ordnance® steel 30mm high rings • Configured for use with a sound suppressor and optional Harris® bipod • Available as a rifle only or full kit

MODEL 700P™ AND MODEL 700P™ LTR™ TWS (TACTICAL WEAPON SYSTEMS) »
The Total Sniper Rifle Packages. Complete packages include:

- Leupold® 3.5-10x LR/T with range finding reticle
- Badger Ordnance® 30mm steel rings
- Badger Ordnance® steel one-piece Picatinny base
- Butler Creek® flip-up lens covers
- Harris® 1A2 bipod
- Uncle Mike's® 1" Quick-Adjust™ sling with swivels
- Pelican® hard case

Remington®

www.remingtondefense.com

MODEL 870P™ POLICE PUMP-ACTION SHOTGUNS

The nation's leading defender. For a half century, the Remington® Model 870P™ has been the pump shotgun of choice for government agencies. With over 10 million produced to date, it remains the standard by which all pump actions are measured. Its dual, non-binding action bars deliver ultra-smooth, reliable cycling. Standing the test of time, extreme conditions and duty. The ultimate pump shotgun, the Model 870P.™



Model 870P™ with Wilson Combat®/XS® Sight System, Ghost Ring sights, Knox® SpecOps™ stock and Parkerized finish (Order #24591)

FEATURES

Non-binding twin action bars provide smoothest, surest pump operation • Receiver milled from solid block of steel • 3" chambers accept all 2 ¾" and 3" 12 gauge shells • Steel-lined, grooved fore-end for a stronger grip • Breech block locks into barrel extension for strength and consistent head space • Balanced sear and inertia firing pin prevents discharge unless action is closed and trigger pulled • Flexitab™ feeding system prevents a misfeed from jamming the shotgun • Cross-bolt safety • Sling swivel studs • Optional engraved insignia and property marks available



Receivers machined from a solid, 8-lb. block of ordnance-grade steel define ruggedness.

MODEL 870P™ »

18" or 20" barrels • SpeedFeed® IV stock version with two magazine tubes holds 4 shells • SpeedFeed® synthetic solid stock and fore-end duplicates the weight and dimensions of factory wood stocks • Parkerized finish • Multiple sight options available • 2 shot extension available on some standard models • Cylinder, improved cylinder or modified choke



Wilson Combat Ghost Ring rear sight and XS® front sight post



Low-profile rifle sights

NO ONE OFFERS SO MUCH VERSATILITY.

Your Remington® Model 870™ can be custom-matched to any tactical situation thanks to our incredible array of stocks, magazines, sighting and accessory options. Add magazine capacity, adjust your stock's length of pull, reduce felt recoil, add a flashlight – there's more, and they're all to maximize your effectiveness in the field.



Model 870P™ with Rifle sights and SpeedFeed® standard stock (Order #24417)



Model 870P™ 14" barrel, low profile sights, pistol grip and Parkerized finish (Order #24453)



Model 870P™ 14" barrel, low profile sights, Parkerized finish and tactical light fore-end (Order #27579)

- **RECEIVERS** – drilled and tapped for optional MCS Picatinny rail
- **SPEEDFEED® STOCKS** – standard & pistol grip, with and without shell wells, 13" & 14" LOP, less-lethal orange, green or black
- **ADVANCED TECHNOLOGY STOCKS** – top and side folding, tactical 6-position collapsible
- **BUTLER CREEK® STOCKS** – side folding stock
- **KNOXX® STOCKS** – SpecOps™ NRS™ recoil-reducing/telescoping, CompStock™ recoil-reducing, and BreachersGrip™ (pistol grip only)
- **FORE-ENDS** – SpeedFeed® and Surefire® tactical light
- **SIGHTS*** – Wilson Combat® Ghost Ring/XS® front bead sights & low-profile rifle sights (tritium available)
- **MAGAZINE EXTENSIONS** – Remington® 2 and 3 shot & Wilson Combat® 1 shot
- **SLINGS** – Tactical or Standard

**Sights subject to availability.*

MODEL 870P™ »

14" barrel with modified choke reduces the overall length for an ideal entry shotgun • Parkerized finish • Multiple sight options available • Less-lethal application shotgun available with blaze orange synthetic SpeedFeed® stock and fore-end • Magazine extension available • 18" barrel with cylinder choke



Magazine Extension Kits



Twin Action Bars

Remington®

www.remingtondefense.com

NEW! REMINGTON ARMS CHASSIS SYSTEM (RACS) – AVAILABLE TO ACCOMMODATE REMINGTON® LONG AND SHORT 700 ACTIONS

The patent-pending Remington Arms Chassis System (RACS) incorporates state-of-the-art operator-defined attributes such as a free-float tubular design and a fully featured front handguard section. Operator-selectable auxiliary rail section pieces in various lengths can be attached to any of the seven remaining facets of the octagonal handguard, which allows the operator to apply clip-on in-line night vision systems in addition to other ancillary systems such as lasers, bipods and other accessories. The folding RACS buttstock provides the operator with a wide variety of adjustments to allow setting the system to suit the shooter and the operating conditions.

Rapid operator adjustments of chassis system to customize the system to the user:

- Adjustable height cheekpiece with fore and aft positional adjustment
- Adjustable position recoil pad
- Adjustable length of pull stock

Folding stock

Cut-out to capture the bolt handle while folded

Accommodates any AR-type grip



Folding stock captures the bolt handle when folded with positive locking mechanism

SPECIFICATIONS

Weight	6.1 lbs.
Overall Length	
Min LOP	36.4"
Max LOP	39.2"
Overall Length Folded	28.25"



20 MOA monolithic top rail ensures adequate elevation adjustment for ranges beyond 1500m while also permitting the installation of ancillary electro-optics



Cable routing guides capture wires associated with electro-optics

Remington® Arms Chassis System, Long Action (RACS-LA)

Recessed sling attachment points

Removable rail pieces and longer overall length free-float tube allows the user to minimize or maximize rails to configure the system to the mission



Remington® Arms Chassis System, Short Action (RACS-SA)

(Folded)

Remington®

www.remingtondefense.com

PREMIER® RIFLE AMMUNITION

Duty and training rifle ammunition. Remington® produces a full line of duty and special application ammunition with superb MOA accuracy, consistent point-of-aim/point-of-impact, unbeatable reliability and superior terminal ballistics. Every cartridge combines the highest-quality brass and bullets with specially blended powders. When lives depend on your first shot, you can trust Remington Premier® rifle ammunition.



REMINGTON® PREMIER® ACCUTIP »

Precision-engineered deformation-resistant polymer tip provides match type accuracy, positive feed and function reliability, and maximum ballistic coefficient • Effectively reduces the chance of over-penetration and ricochet while maximizing the energy transfer • Available in 223 Remington, 7mm Remington Mag., 308 Win., 30-06 Sprg., 300 Win. Mag. and others • Made in the USA

REMINGTON® PREMIER® CORE-LOKT® ULTRA BONDED™ »

Lead core metallurgically adheres to a progressively tapered jacket, specifically designed to control expansion • Combines maximum penetration, controlled 1.8x expansion, and 95% original weight retention • Bullet maintains maximum integrity and stays on target through tough barriers • Available in 223 Remington, 308 Win., 7mm Remington Mag., 300 Win. Mag., 300 Remington Mag., 30-06 Sprg., 300 Remington SA Ultra Mag. and others • Made in the USA





REMINGTON® PREMIER® SCIROCCO BONDED »

Most advanced polymer-tipped, boat-tailed bullet available • Sleek bullet profile produces remarkably flat trajectories • Precise jacket concentricity produces superb accuracy • Progressively tapered, heavy-based, pure copper jacket is bonded to the lead core to retain over 75% of its weight at all velocities • Available in 7mm Remington Mag., 308 Win., 30-06 Sprg., 300 Win. Mag., 300 Remington Ultra Mag. and others • Made in the USA



REMINGTON® PREMIER® MATCH »


Loaded with Sierra® MatchKing® boat-tail bullets, high-grade primers, and specially blended powders for consistent velocity and exceptional accuracy • Available in 308 Win. – 168 and 175 gr., 223 Remington – 69 and 77 gr., and 6.8mm Remington SPC – 115 gr. • Other Premier Match loads are available in 223 Remington – 62 gr. HP Match and 338 Lapua Magnum – 250 gr. Scenar Match



223 Rem

308 Match

338 Lapua

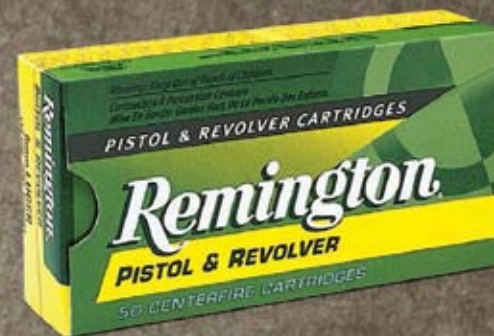

PISTOL & REVOLVER DUTY AMMUNITION »

All cartridges assembled from premium components • Meticulous quality control to ensure reliability • Available in a wide variety of calibers, bullet types and loads to meet your requirements



9mm Luger

380 Auto

38 Special

357 Magnum



357 SIG

40 S&W

10mm Auto

45 GAP


45 Auto

Remington®

www.remingtondefense.com

GOLDEN SABER® HPJ (HIGH-PERFORMANCE JACKET) HANDGUN DUTY AMMUNITION


Terminal performance that cuts three ways. Golden Saber®, the ultimate in street-proven handgun rounds. Our three key design features come together on-target for rapid, controlled expansion; deep penetration; max weight retention and exceptional accuracy. Its unique hollow-point design delivers a previously unattainable level of terminal performance.

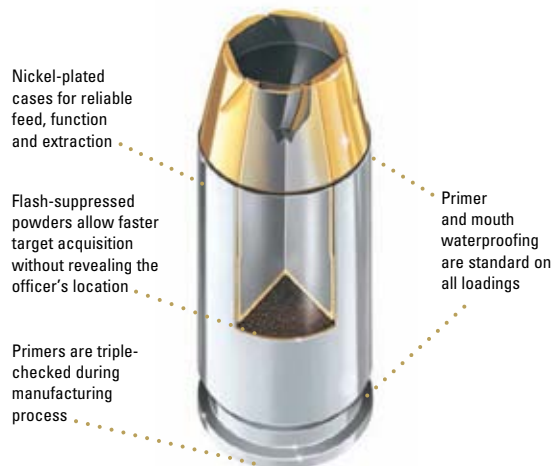

JACKET NOSE CUT » Forms a folded spiral pattern that curls one edge of each jacket petal inward, completely cutting through the lead core into the hollow point • This causes early cavity failure and starts controlled expansion, while still conserving energy for superior penetration • This design ensures positive expansion even at lower velocities


HIGH-PERFORMANCE BRASS JACKET » Made entirely of thicker and stiffer cartridge brass instead of standard copper gilding metal • Jacket petals open rapidly to form shoulders that support the mushrooming core, which creates an aggressive frontal area (at least 1.6 times the bullet diameter) over a longer distance in the wound cavity

DRIVING BAND™ » Located at the bullet's rear, the Driving Band is the larger base diameter behind the front section of bore diameter • This configuration mechanically locks core to jacket to prevent core/jacket separation and reduces rifling contact friction for optimum muzzle velocity • Also, the reduced front diameter allows the bullet to align precisely in the bore before the band engages the rifling to produce true match-grade accuracy and higher velocity conservation

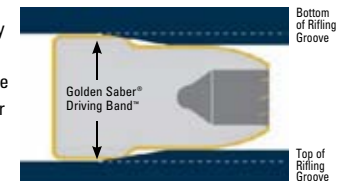

PUNCHES THROUGH BARRIERS AND DELIVERS SUPERIOR TERMINAL PERFORMANCE BEYOND.

Sequence of high-speed photography showing the superior performance of Golden Saber® HPJ Bonded™ through auto glass. Shot was set up to mimic one taken from the left front quarter of a vehicle. FRAME 1: 230-gr., 45 caliber Golden Saber® Bonded™ bullet impacts typical windshield glass. FRAMES 2-4: Bullet passes through windshield. FRAME 5: Emerges from the glass intact. Jacket and core held together through ASI ¼-inch laminated safety glass.

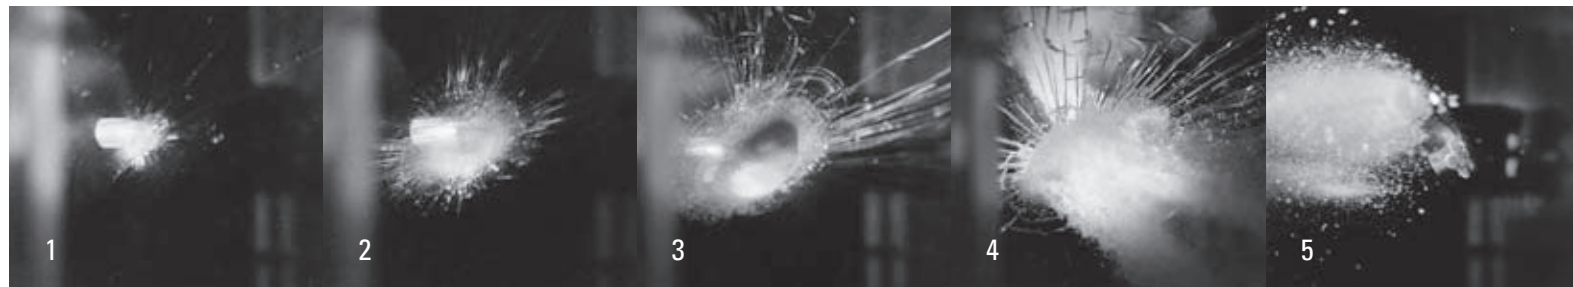



GOLDEN SABER® BONDED™ » All the revolutionary features that make Golden Saber® rounds the leading edge in tactical handgun rounds, along with the unmatched barrier-penetration performance of our special bonded-bullet design.

The standard for barrier-penetration performance • Through exclusive Remington® process, lead core hot-bonded to brass jacket • Exceptional weight retention – up to 97% through auto glass • Reduced bullet nose diameter for precise bore alignment and match-grade accuracy • Requires less energy to initiate expansion • Jacket stiffness and wall thickness optimized to eliminate over-expansion, thus maximizing penetration • Available in 357 SIG, 9mm Luger, 40 S&W and 45 Auto • Made in the USA

GOLDEN SABER® HPJ (HIGH-PERFORMANCE JACKET) » Industry-exclusive Driving Band™ • Jacket made entirely of cartridge brass • Nickel-plated cases for more reliable feeding • Waterproofed primers and case mouths provide max integrity in all weather conditions • Virtually 100% weight retention • Precise hollow-point cavity design maximizes penetration by minimizing lead core deformation • Flash-suppressed powders allow faster low-light target reacquisition • Reduced bullet nose diameter for precise bore alignment and match-grade accuracy • Optimum barrier penetration and expansion through a full range of accepted barrier tests • Available in 380 Auto, 9mm Luger, 38 Special, 357 Mag., 40 S&W and 45 Auto • Made in the USA




This series of photos shows the totally controlled and extremely uniform expansion of Golden Saber® HPJ bullets.



*Golden Saber® HPJ Bonded™
9mm Luger, 147-gr.,
25 yds. 10 Shots, .9"*



Golden Saber® HPJ Bonded™ bullets have the same industry-exclusive Driving Band™ profile that centers the bullet perfectly in the bore as it moves into the rifling. This results in match-grade accuracy and higher velocity conservation.

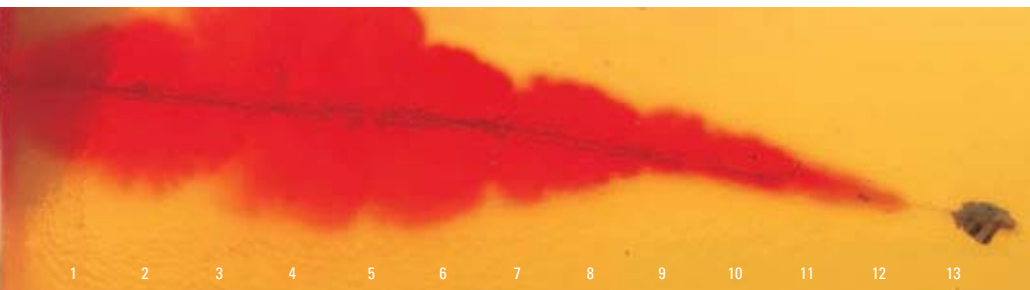

A block of gelatin placed 10" beyond the auto-glass setup to catch the bullet. Even after smashing through safety glass, the 45-cal. Golden Saber® Bonded™ still delivers a large-volume stretch cavity with over 12" of penetration.

Remington®

www.remingtondefense.com


GOLDEN SABER® HPJ (HIGH-PERFORMANCE JACKET) HANDGUN BARRIER TEST RESULTS

GOLDEN SABER® BONDED™

HEAVY CLOTHING @ 10 FEET



AUTO GLASS @ 10 FEET

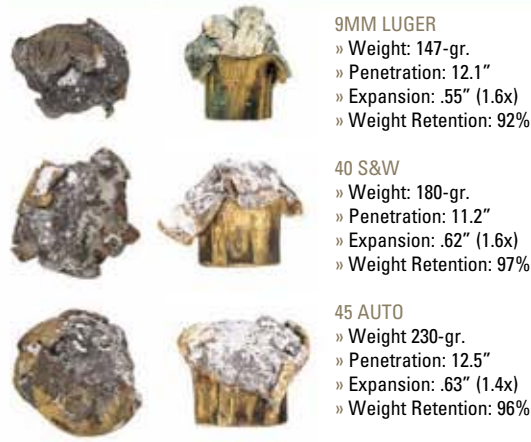

WALLBOARD @ 10 FEET



STEEL @ 10 FEET



GOLDEN SABER® HPJ (HIGH-PERFORMANCE JACKET)

HEAVY CLOTHING @ 10 FEET



HEAVY CLOTHING @ 20 YARDS




WALLBOARD @ 10 FEET



STEEL @ 10 FEET



BALLISTIC PERFORMANCE 40 S&W 165-GR. GOLDEN SABER® HPJ MUZZLE FLASH COMPARISON

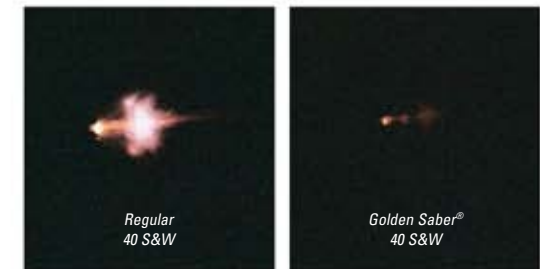

All Golden Saber® powders are treated with a chemical flash suppressant that retards flame propagation. This minimizes night blindness for the shooter while helping to conceal location.

GOLDEN SABER® BONDED

9mm Luger	Index Number – GSB9MMD	RAMAC – 29351
Primer	1 ½	
Load	9mm Luger +P	
Bullet Weight/Style	124-gr. BJHP-Bonded	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	1180 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	384 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, auto glass @ 10 ft., average values Penetration: 11.3 inches Expansion: .54 inch dia. (1.7x) Weight Retention: 90%	
9mm Luger	Index Number – GSB9MMC	RAMAC – 29353
Primer	1 ½	
Load	Standard	
Bullet Weight/Style	147-gr. BJHP-Bonded	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	990 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	320 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, auto glass @ 10 ft., average values Penetration: 12.3 inches Expansion: .54 inch dia. (1.7x) Weight Retention: 90%	
357 Sig	Index Number – GSB357SB	RAMAC – 29408
Primer	5 ½	
Load	Standard	
Bullet Weight/Style	125-gr. BJHP-Bonded	
Jacket Material	Brass (Copper alloy 260)	
Core Material	99.25% Lead, .75% Antimony	
Muzzle Velocity	1350 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	506 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, auto glass @ 10 ft., average values Penetration: 12.3 inches Expansion: .58 inch dia. (1.6x) Weight Retention: 82%	
40 S&W	Index Number – GSB40SWA	RAMAC – 29366
Primer	5 ½	
Load	Standard	
Bullet Weight/Style	165-gr. BJHP-Bonded	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	1150 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	485 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, auto glass @ 10 ft., average values Penetration: 11.4 inches Expansion: .71 inch dia. (1.8x) Weight Retention: 92%	
40 S&W	Index Number – GSB40SWB	RAMAC – 29436
Primer	5 ½	
Load	Standard	
Bullet Weight/Style	180-gr. BJHP-Bonded	
Jacket Material	Brass (Copper alloy 260)	
Core Material	99.25% Lead, .75% Antimony	
Muzzle Velocity	1015 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	412 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, auto glass @ 10 ft., average values Penetration: 11.2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97%	
45 AUTO	Index Number – GSB45APB	RAMAC – 29416
Primer	2 ½	
Load	Standard	
Bullet Weight/Style	230-gr. BJHP-Bonded	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	875 fps using a 5" SAAMI standard test barrel	
Muzzle Energy	391 ft.-lbs.	
Accuracy	2.8" Max. avg. extreme spread @ 50 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	5" pistol, auto glass @ 10 ft., average values Penetration: 12.5 inches Expansion: .63 inch dia. (1.4x) Weight Retention: 96%	
45 AUTO	Index Number – GSB45APA	RAMAC – 29414
Primer	2 ½	
Load	Standard	
Bullet Weight/Style	185-gr. BJHP-Bonded	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	1015 fps using a 5" SAAMI standard test barrel	
Muzzle Energy	534 ft.-lbs.	
Accuracy	2.8" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, auto glass @ 10 ft., average values Penetration: 12.1 inches Expansion: .65 inch dia. (1.4x) Weight Retention: 94%	

GOLDEN SABER® HPJ (HIGH-PERFORMANCE JACKET)

9mm Luger	Index Number – GS9MMC	RAMAC – 29422
Primer	1 ½	
Load	Standard	
Bullet Weight/Style	147-gr. BJHP	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	990 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	320 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, 10% ordnance gelatin @ 10 ft., average values Penetration: 12.8 inches Expansion: .66 inch dia. (1.8x) Weight Retention: 100%	
9mm Luger +P	Index Number – GS9MMD	RAMAC – 29424
Primer	5 ½	
Load	+P	
Bullet Weight/Style	124-gr. BJHP	
Jacket Material	Brass (Copper alloy 260)	
Core Material	99.25% Lead, .75% Antimony	
Muzzle Velocity	1180 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	384 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, 10% ordnance gelatin @ 10 ft., average values Penetration: 14.3 inches Expansion: .54 inch dia. (1.5x) Weight Retention: 99.9%	
40 S&W	Index Number – GS40SWA	RAMAC – 29440
Primer	5 ½	
Load	Standard	
Bullet Weight/Style	165-gr. BJHP	
Jacket Material	Brass (Copper alloy 260)	
Core Material	99.25% Lead, .75% Antimony	
Muzzle Velocity	1150 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	485 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, 10% ordnance gelatin @ 10 ft., average values Penetration: 14.1 inches Expansion: .60 inch dia. (1.5x) Weight Retention: 100%	
40 S&W	Index Number – GS40SWB	RAMAC – 29442
Primer	5 ½	
Load	Standard	
Bullet Weight/Style	180-gr. BJHP	
Jacket Material	Brass (Copper alloy 260)	
Core Material	99.25% Lead, .75% Antimony	
Muzzle Velocity	1015 fps using a 4" SAAMI standard test barrel	
Muzzle Energy	412 ft.-lbs.	
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	4" pistol, 10% ordnance gelatin @ 10 ft., average values Penetration: 12.3 inches Expansion: .68 inch dia. (1.7x) Weight Retention: 99.9%	
45 AUTO	Index Number – GS45APA	RAMAC – 29444
Primer	2 ½	
Load	Standard	
Bullet Weight/Style	230-gr. BJHP	
Jacket Material	Brass (Copper alloy 260)	
Core Material	99.25% Lead, .75% Antimony	
Muzzle Velocity	1015 fps using a 5" SAAMI standard test barrel	
Muzzle Energy	423 ft.-lbs.	
Accuracy	2.8" Max. avg. extreme spread @ 50 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	5" pistol, 10% ordnance gelatin @ 10 ft., average values Penetration: 14.8 inches Expansion: .60 inch dia. (1.3x) Weight Retention: 100%	
45 AUTO	Index Number – GS45APB	RAMAC – 29448
Primer	2 ½	
Load	Standard	
Bullet Weight/Style	230-gr. BJHP	
Jacket Material	Brass (Copper alloy 260)	
Core Material	100% Lead	
Muzzle Velocity	875 fps using a 5" SAAMI standard test barrel	
Muzzle Energy	391 ft.-lbs.	
Accuracy	2.8" Max. avg. extreme spread @ 50 yards (Three 5 round groups using a universal receiver test system)	
Bullet Performance	5" pistol, 10% ordnance gelatin @ 10 ft., average values Penetration: 15.0 inches Expansion: .71 inch dia. (1.6x) Weight Retention: 100%	

DISINTEGRATOR® LEAD-FREE, REDUCED HAZARD TRAINING AMMUNITION.


Pulverizing previous standards for excellence. The road to flawless execution is paved in Remington® green. That is, empty cases and the powdered remnants of our frangible and specialized training ammunition. No one equips you for perfect practice like Remington.® Exactly why we're the top choice for government agencies everywhere – in the field and on the course.



DISINTEGRATOR® PLATED FRANGIBLE » Disintegrator® Lead-Free and Heavy-Metal-Free Plated Frangible Ammo helps provide a reduced hazard range for students, instructors and the environment • Disintegrator® plated frangible bullets feature a high-strength metal particle core completely sealed in a jacket of electroplated copper • Splash-back is greatly reduced when fired against angled surfaces, enhancing student safety at minimal target distances



Disintegrator®
plated particles
shot at 10 ft. and 90°

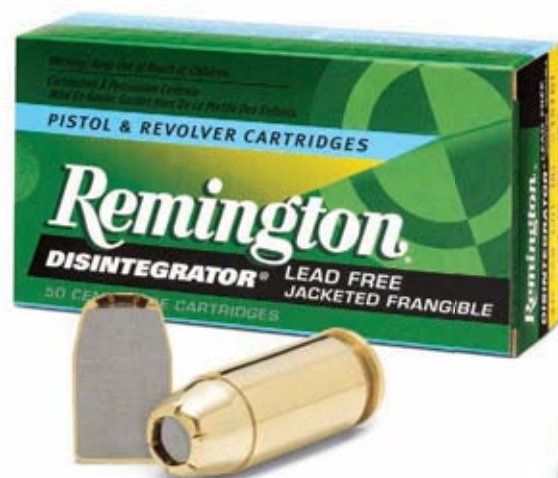


Disintegrator® Jacketed Frangible Ammo is our most cost effective frangible training solution. It is used where particle splash-back is not a concern.



DISINTEGRATOR® JACKETED FRANGIBLE » Disintegrator® Jacketed Frangible Ammo is a totally lead-free and heavy-metal-free, frangible training load for realistic, safe and cost-effective training and qualification programs • Bullet construction is a high strength metal particle core sealed in a jacket that instantly breaks up when impacting steel targets or backstops, leaving harmless metal particles and small pieces of thin jacket • Available in 9mm Luger +P, 40 S&W and 223 Remington

Disintegrator® Jacketed particles

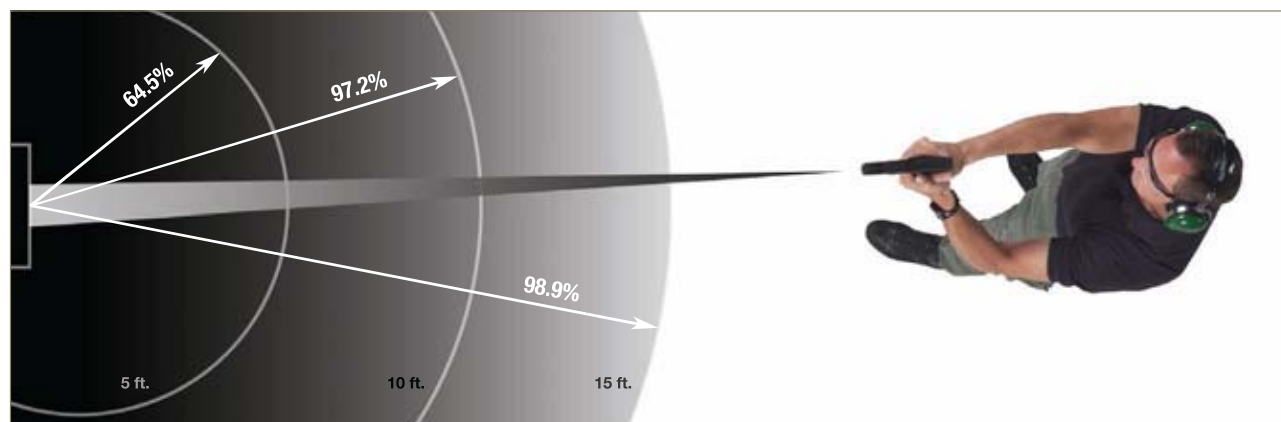

Radius of Particle Splash-Back. With Disintegrator® training ammunition, material splash-back from backstops is virtually eliminated. The extreme frangibility of Disintegrator bullets allows complete break-up with nothing left but fine particle dust and harmless pieces of copper plate. In testing against a hard steel backstop at a 90-degree angle, 98.9% of the bullet mass fell to the floor at fifteen feet from the backstop.

WHY DISINTEGRATOR® IS THE LEADER IN LEAD-FREE AMMUNITION:

- Completely lead-free and heavy-metal-free round for practice, competition and law enforcement where airborne lead or spent lead recovery is an issue
- Lead-free and heavy-metal-free priming mix provides clean, instantaneous ignition, while special powder blends enhance velocities to simulate the felt recoil and point of impact of standard lead-core bullets
- Superior accuracy is achieved through a precise manufacturing process that produces precise bullet concentricity
- Disintegrator ammunition reduces wear and damage to bullet traps and steel backstops as well as collateral damage to range fixtures
- Nothing is left after impact but harmless metal particles and small pieces of thin copper plate or copper jacket
- Disintegrator bullet profiles are based on field-proven Remington® designs for reliable feed and function in a wide range of firearms
- Disintegrator ammunition is perfect for training to special-duty applications

Remington®

www.remingtondefense.com

En-gauge and immobilize. For close-range tactical scenarios, Remington® 12 gauge ammunition is a clean sweep. Our selection of street-proven slugs and buckshot has been perfected over decades in the field. We match the finest components with rigid standards for quality control to create the only shotgun loads worthy of a trip down a Remington tactical shotgun barrel.

SLUGS 12 GAUGE DUTY SHELLS




12 gauge slugs are available in full power and reduced recoil for duty and training conditions. While the Slugger® Rifled Slugs remain the industry standard, the Reduced Recoil Rifled Slugs generate 45% less recoil than a standard 1-oz. rifled slug. In the field or on the course, Remington provides the perfect slugs for any shotgun duty use.

REDUCED RECOIL RIFLED SLUGS » Specifically engineered to improve a shooter's capabilities with a shotgun • Generate 45% less recoil than a standard 1-oz. rifled slug • Helps during training and encourages shotgun duty use • Point-of-Impact is identical to a standard 1-oz. slug out to 50 yards and only 1 ½" lower at 100-yards • High-density polymer alignment disk under the slug's base produces enhanced accuracy • Waterproof primer for maximum reliability




Reduced Recoil Slug
12 ga., 2 ¾", 1-oz. slug,
10 shots, 25 yards,
I.C. Choke,
1,200 FPS

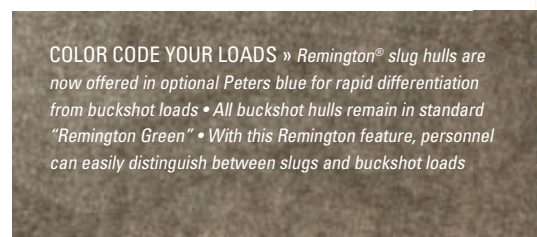

COLOR CODE YOUR LOADS » Remington® slug hulls are now offered in optional Peters blue for rapid differentiation from buckshot loads • All buckshot hulls remain in standard "Remington Green" • With this Remington feature, personnel can easily distinguish between slugs and buckshot loads




SLUGGER® RIFLED SLUGS » Larger slug diameter for better gas sealing • High-density polymer disk under the slug produces a perfectly aligned exit from the muzzle for dramatically enhanced accuracy

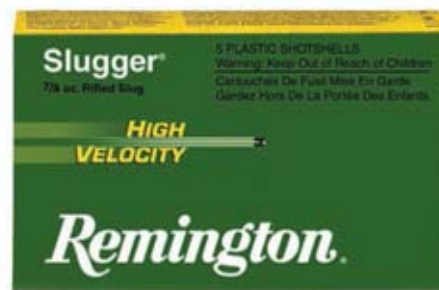

Full Velocity Slugger
12 ga., 2 ¾", 1-oz. slug,
10 shots, 25 yards,
I.C. Choke,
1,560 FPS



FRANGIBLE SABOT SLUGS » Reliable lead-free and heavy-metal-free primer • Lead-free slugs produce instant, complete breakup when impacting steel targets and steel backstops • Optimized powder blends for efficient utilization with minimum unburned residue • Accuracy performance nearly equivalent to conventional loads • Slug fragment splash-back virtually eliminated

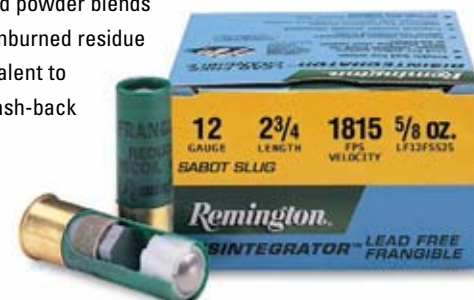

TACTICAL BUCKSHOT 12 GAUGE DUTY SHELLS

TAC 8® 00-BUCKSHOT »

A full load 8-pellet 00-Buck that boasts a highly concentrated ½" to ¾" per yard pattern spread

- Pattern controlled by utilizing 00-buck with 3% antimony lead and a precisely loaded special shot cup
- Waterproof primer and mouth for maximum reliability under harsh environmental conditions




1 ROUND OF TAC 8
fired at 15 yards, IC Choke



5 ROUNDS OF TAC 8
fired at 15 yards, IC Choke



FRANGIBLE BUCKSHOT » Reliable lead-free and heavy-metal-free primer • Lead-free pellets produce instant, complete breakup when impacting steel targets and steel backstops • Optimized powder blends for efficient utilization with minimum unburned residue • Pattern performance nearly equivalent to conventional loads • Shotcup and buffering protect shot for enhanced patterns • Pellet fragment splash-back virtually eliminated

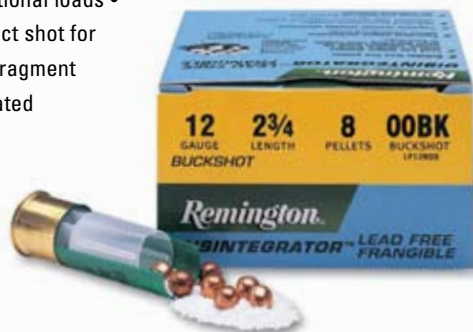

REDUCED-RECOIL

00-BUCKSHOT » Made specifically for duty and training applications that encourage shotgun usage • Our 8- or 9-pellet Reduced-Recoil 00-Buckshot produces lower felt recoil by 40% for better follow-up shots



- Enhanced with Power Piston® shot cup, polymer buffering, and hardened 3% antimony lead pellets contributing to outstanding patterns

BUCKSHOT » Available in standard and magnum loadings and 5 buckshot sizes: 000, 00, 0, 1 and 4 • Provides reliability, consistency and stopping power • Our 9-pellet 00-Express LE Buckshot created a new standard of pattern performance with the addition of our one-piece compression section Power Piston® wad column, polymer buffering and hard lead pellets • This combination produces patterns 25% tighter than previous buckshot offerings



TB12 BREACHING ROUND

TB12

TB12 is a mission-specific shotgun ballistic breaching round used to defeat a variety of urban structures to include exterior and interior doors. TB12 provides a dramatic reduction in collateral damage to non-combatants as well as operators through the use of a frangible material that delivers maximum energy to the breach point yet turns to a near harmless powder upon impact. TB12 is a cost-effective training and operational breaching round allowing operators to "train as they fight." The frangible property of TB12 delivers near-threat lethality in addition to being a superb breaching round, ensuring that the breacher remains operational regardless of the weapon system being used.



Remington®

www.remingtondefense.com

REMINGTON® CENTERFIRE RIFLE CARTRIDGE

(Packed 20 rounds per box, 10 boxes per case, 200 rounds per case)

"ZERO" INDICATES YARDAGE AT WHICH RIFLE WAS SIGHTED IN.
Bullet does not rise more than 1" above line of sight from muzzle to sighting-in range.

Caliber	Index IDI No.	Ramac No.	Primer No.	Wt. (g.)	Bullet Style	VELOCITY (ft/sec)			ENERGY (ft./lbs.)			SHORT-RANGE TRAJECTORY						Ballistic Coefficient
						Muzzle	100 yds.	200 yds.	Muzzle	100 yds.	200 yds.	50 yds.	100 yds.	150 yds.	200 yds.	250 yds.	300 yds.	
223 Remington	PRA223RB	29184	7 ½	50	AccuTip, Boat Tail	3410	2989	2605	1291	992	753	-0.1	0.4	ZERO	-1.5	-4.4	-8.7	0.242
	PRA223RC	29192	7 ½	55	AccuTip, Boat Tail	3240	2854	2500	1282	995	763	0.2	0.6	ZERO	-1.8	-5.1	-9.9	0.255
	R223R1	28399	7 ½	55	PSP	3240	2747	2304	1282	921	648	0.0	0.6	ZERO	-2.0	-5.6	-11.2	0.197
	R223R2	29047	7 ½	55	HP, Power-Lokt	3240	2773	2352	1282	939	675	0.0	0.6	ZERO	-1.9	-5.4	-10.7	0.209
	R223R3	28401	7 ½	55	Metal Case	3240	2759	2326	1282	929	660	0.0	0.6	ZERO	-1.9	-5.5	-11.0	0.202
	R223R6	22106	7 ½	62	HP (Match)	3025	2572	2162	1260	911	643	0.2	0.7	ZERO	-2.3	-6.5	-12.9	0.205
	RM223R1	27680	7 ½	69	BTHP (Match)	3000	2720	2457	1379	1133	925	0.1	0.6	ZERO	-1.9	-5.3	-10.3	0.336
	RM223R3	27686	7 ½	77	BTHP (Match)	2800	2551	2314	1340	1112	916	0.3	0.8	ZERO	-2.3	-6.2	-11.8	0.375
6.8mm Remington SPC	R68R1	29146	9 ½	115	OT (Match)	2625	2373	2135	1759	1437	1163	0.4	1.0	ZERO	-2.7	-7.3	-14.1	0.344
	RM68R1	27676	9 ½	115	BTHP (Match)	2625	2365	2119	1759	1428	1147	0.5	1.0	ZERO	-2.7	-7.4	-14.3	0.333
	PRC68R4	29128	9 ½	115	Core-Lokt Ultra Bonded	2625	2332	2058	1759	1389	1082	0.5	1.0	ZERO	-2.8	-7.8	-15.0	0.295
30-30 Win.	R3030A	21397	9 ½	55	SP, Accelerator	3400	2693	2085	1412	886	531	0.0	0.6	ZERO	-2.2	-6.2	-13.2	0.139
	R30301	27818	9 ½	150	SP, Core-Lokt	2390	1973	1605	1902	1296	858	0.2	ZERO	-2.4	-7.6	-16.1	-28.8	0.193
	R30302	27820	9 ½	170	SP, Core-Lokt	2200	1895	1619	1827	1355	989	0.3	ZERO	-2.7	-8.3	-17.1	-29.9	0.254
	R30303	21395	9 ½	170	HP, Core-Lokt	2200	1895	1619	1827	1355	989	0.3	ZERO	-2.7	-8.3	-17.1	-29.9	0.254
30 Carbine	R30CAR	28322	6 ½	110	SP	1990	1567	1236	967	600	373	0.6	ZERO	-4.2	-12.9	-27.2	-48.6	0.166
300 Remington Ultra Mag.	PR300UM5	27950	9 ½	150	Swift Scirocco Bonded	3450	3208	2980	3964	3427	2956	0.0	0.3	ZERO	-1.2	-3.4	-6.7	0.435
	PR300UM3	27936	9 ½	180	Swift Scirocco Bonded	3250	3048	2856	4221	3714	3260	0.0	0.4	ZERO	-1.4	-3.9	-7.5	0.500
	PR300UM4	27948	9 ½	180	SP, Core-Lokt Ultra	3250	2988	2742	4221	3568	3003	0.0	0.4	ZERO	-1.5	-4.2	-8.1	0.382
300 Remington SA Ultra Mag.	PR300SM1	27952	9 ½ M	150	PSP, Core-Lokt Ultra	3200	2901	2622	3410	2803	2290	0.1	0.5	ZERO	-1.6	-4.6	-8.9	0.330
	PR300SM2	27954	9 ½ M	165	SP, Core-Lokt Ultra	3075	2792	2527	3464	2856	2339	0.1	0.6	ZERO	-1.8	-5.0	-9.7	0.339
300 Win. Mag.	R300W1	29495	9 ½ M	150	PSP, Core-Lokt	3290	2950	2634	3605	2897	2311	0.0	0.5	ZERO	-1.6	-4.4	-8.7	0.294
	PRC300WA	29034	9 ½ M	150	Core-Lokt Ultra Bonded	3290	2967	2666	3605	2931	2366	-0.1	0.5	ZERO	-1.6	-4.3	-8.5	0.310
	PRSC300WB	29330	9 ½ M	180	Swift Scirocco Bonded	2960	2274	2595	3501	3075	2692	0.1	0.6	ZERO	-1.8	-4.9	-9.4	0.507
	PRC300WC	29032	9 ½ M	180	Core-Lokt Ultra Bonded	2960	2774	2505	3501	2971	2508	0.1	0.6	ZERO	-1.9	-5.2	-10.0	0.402
	PRA300WC	29212	9 ½ M	180	AccuTip, Boat Tail	2960	2764	2577	3501	3053	2653	0.1	0.6	ZERO	-1.8	-4.9	-9.5	0.481
	R300W2	29497	9 ½ M	180	PSP, Core-Lokt	2960	2715	2482	3501	2945	2463	0.1	0.6	ZERO	-1.9	-5.3	-10.2	0.383
	RM300W7	27684	9 ½ M	190	BTHP (Match)	2900	2725	2557	3547	3133	2758	0.1	0.6	ZERO	-1.9	-5.1	-9.8	0.533
338 Lapua Magnum	RM338LMR1	27944	9 ½ M	250	Scenar	2960	2820	2683	4863	4412	3996	0.3	0.6	ZERO	-1.7	-4.7	-8.9	0.675

Bullet Style Descriptions: OT=Open Tip / BTHP=Boat Tail Hollow Point / HP=Hollow Point / PSP=Pointed Soft Point / SP=Soft Point

UMC® CENTERFIRE RIFLE CARTRIDGE

(Packed 20 rounds per box, 10 boxes per case, 200 rounds per case)

"ZERO" INDICATES YARDAGE AT WHICH RIFLE WAS SIGHTED IN.
Bullet does not rise more than 1" above line of sight from muzzle to sighting-in range.

Caliber	Index IDI No.	Ramac No.	Primer No.	Wt. (g.)	Bullet Style	VELOCITY (ft/sec)			ENERGY (ft./lbs.)			SHORT-RANGE TRAJECTORY						Ballistic Coefficient
						Muzzle	100 yds.	200 yds.	Muzzle	100 yds.	200 yds.	50 yds.	100 yds.	150 yds.	200 yds.	250 yds.	300 yds.	
223 Remington	L223R7	23748	7 ½	45	Jacketed Hollow Point	3550	2953	2430	1259	871	590	-0.1	0.4	ZERO	-1.7	-4.8	-9.7	0.173
	L223R8	23812	7 ½	50	Jacketed Hollow Point	3425	2899	2430	1302	933	655	-0.1	0.5	ZERO	-1.7	-4.9	-9.9	0.192
	L223R3	23711	7 ½	55	Metal Case	3240	2759	2326	1282	929	660	0.0	0.6	ZERO	-1.9	-5.5	-11.0	0.202
	L223R3L ¹	23894	7 ½	55	Metal Case	3240	2993	2759	1282	1094	930	-0.1	0.6	ZERO	-1.9	-5.5	-11.0	0.202
	L223R9	23815	7 ½	62	Closed Tip Flat Base	3100	2734	2396	1323	1029	790	0.1	0.6	ZERO	-1.9	-5.4	-10.6	0.260
308 Win.	L308W4	23715	9 ½	150	Metal Case	2820	2533	2263	2648	2137	1705	-0.1	ZERO	-1.2	-3.9	-8.4	-14.7	0.314
6.8mm Remington SPC	L68R2	24035	9 ½	115	MC	2625	2329	2053	1759	1385	1076	0.5	1.0	ZERO	-2.9	-7.8	-15.1	0.292
7.62 x 39mm	L762391	23709	7 ½	123	Metal Case	2365	2060	1780	1527	1159	865	0.1	ZERO	-2.2	-6.8	-14.1	-24.5	0.266

¹ Linked in 100 Round Belt, 5 Belts Per Case, 500 Rounds Per Case.

REMINGTON® PISTOL AND REVOLVER DUTY AMMUNITION (Packed 50 rounds per box, 10 boxes per case, 500 rounds per case)

Caliber	Index IDI No.	Ramac No.	Primer No.	Wt. (g.)	Bullet Style	VELOCITY (ft/sec)			ENERGY (ft./lbs.)			MID-RANGE TRAJECTORY (inch)	
						Muzzle	25 yds.	50 yds.	Muzzle	25 yds.	50 yds.	25 yds.	50 yds.
32 S&W	R32SW	22204	1 ½	88	Lead	680	645	610	90	81	73	0.6	2.5
32 S&W Long	R32SWL	22208	1 ½	98	Lead	705	670	635	115	98	88	0.6	2.3
32 (7.65mm) Auto	R32AP	22212	1 ½	71	Metal Case	905	855	810	129	115	97	0.4	1.4
357 Mag. ¹	R357M7	22228	5 ½	110	Semi-Jacketed Hollow Point	1295	1094	975	410	292	232	0.2	0.8
	R357M1	22216	5 ½	125	Semi-Jacketed Hollow Point	1450	1240	1090	583	427	330	0.1	0.6
	R357M2	22218	5 ½	158	Semi-Jacketed Hollow Point	1235	1104	1015	535	428	361	0.2	0.8
	R357M3	22220	5 ½	158	Soft Point	1235	1104	1015	535	428	361	0.2	0.8
	R357M5	22224	5 ½	158	Semi-Wadcutter	1235	1104	1015	535	428	361	0.2	0.8
9mm Luger	RH357MA	29466	5 ½	165	Jacketed Hollow Point Core-Lokt	1290	1237	1189	610	561	518	0.2	0.7
	R357M10	22234	5 ½	180	Semi-Jacketed Hollow Point	1145	1053	985	524	443	388	0.2	0.9
	R9MM1	28285	1 ½	115	Jacketed Hollow Point	1155	1047	971	341	280	241	0.9	3.9
	R9MM3	28290	1 ½	115	Metal Case	1135	1041	973	329	277	242	0.9	4.0
	R9MM6	28289	1 ½	115	Jacketed Hollow Point (+P) ²	1250	1113	1019	399	316	265	0.2	0.8
	RB9MM6	28324	1 ½	115	Jacketed Hollow Point, Bonded (+P) ²	1250	1175	1113	399	353	316	0.2	0.8
	R9MM2	22240	1 ½	124	Metal Case	1110	1030	971	339	292	259	0.2	0.9
	R9MM8	28299	1 ½	147	Jacketed Hollow Point (Subsonic)	990	941	900	320	289	264	0.3	1.1
	R380A1	22246	1 ½	88	Jacketed Hollow Point	990	920	868	191	165	146	0.3	1.2
	R380AP	22252	1 ½	95	Metal Case	955	865	785	190	160	130	0.3	1.4
38 S&W	R38SW	22276	1 ½	146	Lead Round Nose	685	650	620	150	135	125	0.6	2.5
38 Special ¹	R38S10	22298	1 ½	110	Semi-Jacketed Hollow Point (+P) ²	995	926	871	242	210	185	0.3	1.2
	R38S16	22310	1 ½	110	Semi-Jacketed Hollow Point	950	890	840	220	194	172	0.3	1.3
	R38S2	22282	1 ½	125	Semi-Jacketed Hollow Point (+P) ²	945	898	858	248	224	204	0.3	1.3
	R38S3	22284	1 ½	148	Targetmaster® Lead WC Match	710	634	566	166	132	105	0.6	2.4
	R38S5	22288	1 ½	158	Lead Round Nose	755	723	692	200	183	168	0.5	2.1
	R38S14	22304	1 ½	158	Semi-Wadcutter (+P) ²	890	855	823	278	257	238	0.3	1.4
	R38S6	22290	1 ½	158	Semi-Wadcutter	755	723	692	200	183	168	0.5	2.1
	R38S12	22300	1 ½	158	Lead Hollow Point (+P) ²	890	855	823	278	257	238	0.3	1.4
	R357S1	22258	5 ½	125	Jacketed Hollow Point	1350	1245	1157	506	430	372	0.2	0.7
	R40SW1	28347	5 ½	155	Jacketed Hollow Point	1205	1095	1017	499	413	356	0.2	0.8
40 S&W	R40SW2	28353	5 ½	180	Jacketed Hollow Point	1015	960	914	412	368	334	0.3	1.1
	R40SW5	28799	5 ½	155	Metal Case	1205	1134	1076	500	443	399	0.2	0.8
	R45C	28490	2 ½	250	Lead Round Nose	860	820	780	410	375	340	0.4	1.6
	R45AP2	21456	2 ½	185	Jacketed Hollow Point	1000	939	889	411	362	324	0.3	1.1
	R45AP7	21469	2 ½	230	Jacketed Hollow Point (Subsonic)	835	800	767	356	326	300	0.4	1.6
	R45AP4	21448	2 ½	230	Metal Case	835	800	767	356	326	300	0.4	1.6

¹ Note: These ballistics reflect vented barrel. ² Ammunition with "+P" or "+P+" on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer.

GOLDEN SABER® BONDED HPJ (HIGH-PERFORMANCE JACKET) (Packed 50 rounds per box, 10 boxes per case, 500 rounds per case)

Caliber	Index IDI No.	Ramac No.	Primer No.	Wt. (g.)	Bullet Style	VELOCITY (ft/sec)			ENERGY (ft./lbs.)			MID-RANGE TRAJECTORY (inch)	
						Muzzle	25 yds.	50 yds.	Muzzle	25 yds.	50 yds.	25 yds.	50 yds.
357 SIG	GSB357SB	29408	5 ½	125	Brass-Jacketed Hollow Point, Bonded	1350	1245	1157	506	430	372	0.2	0.7
9mm Luger (+P) ¹	GS9MMD	29424	1 ½	124	Brass-Jacketed Hollow Point, Bonded (+P) ¹	1180	1131	1089	383	352	326	0.2	0.8
	GSB9MMC	29352	1 ½	147	Brass-Jacketed Hollow Point, Bonded	990	965	941	320	304	289	0.3	1.1
40 S&W	GSB40SWA	29366	5 ½	165	Brass-Jacketed Hollow Point, Bonded	1150	1089	1040	484	435	396	0.2	0.9
	GSB40SWB	29368	5 ½	180	Brass-Jacketed Hollow Point, Bonded	1015	986	960	412	388	368	0.3	1.1
45 Auto	GSB45APA	29414	2 ½	185	Brass-Jacketed Hollow Point, Bonded	1015	981	951	423	395	371	0.3	1.1
	GSB45APB	29378	2 ½	230	Brass-Jacketed Hollow Point, Bonded	875	853	833	391	372	354	0.4	1.5

¹ Ammunition with “+P” or “+P+” on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer.

GOLDEN SABER® HPJ (HIGH-PERFORMANCE JACKET) (Packed 25 rounds per box, 20 boxes per case, 500 rounds per case)

Caliber	Index IDI No.	Ramac No.	Primer No.	Wt. (g.)	Bullet Style	VELOCITY (ft/sec)			ENERGY (ft./lbs.)			MID-RANGE TRAJECTORY (inch)	
						Muzzle	25 yds.	50 yds.	Muzzle	25 yds.	50 yds.	25 yds.	50 yds.
357 Mag. ¹	GS357MA	29400	5 ½	125	Brass-Jacketed Hollow Point	1220	1152	1095	413	368	333	0.2	0.8
9mm Luger	GS9MMB	29420	1 ½	124	Brass-Jacketed Hollow Point	1125	1074	1031	349	317	293	0.2	0.9
	GSB9MMD	29350	1 ½	124	Brass-Jacketed Hollow Point (+P) ²	1180	1131	1089	384	352	327	0.2	0.8
	GS9MMC	29422	1 ½	147	Brass-Jacketed Hollow Point	990	965	941	320	304	289	0.3	1.1
380 Auto	GS380B	29410	1 ½	102	Brass-Jacketed Hollow Point	940	920	901	200	192	184	0.3	1.4
38 Special ¹	GS38SB	29432	1 ½	125	Brass-Jacketed Hollow Point (+P) ²	975	950	929	264	250	238	0.3	1.3
40 S&W	GS40SWA	29440	5 ½	165	Brass-Jacketed Hollow Point	1150	1089	1040	485	435	396	0.2	0.9
	GS40SWB	29442	5 ½	180	Brass-Jacketed Hollow Point	1015	986	960	412	388	368	0.3	1.1
45 Auto	GS45AP	29444	2 ½	185	Brass-Jacketed Hollow Point	1015	981	951	423	395	371	0.3	1.1
	GS45APB	29448	2 ½	230	Brass-Jacketed Hollow Point	875	853	833	391	372	355	0.4	1.5
	GS45APC	29450	2 ½	185	Brass-Jacketed Hollow Point (+P) ²	1140	1086	1041	534	484	445	0.2	0.9

¹ Note: These ballistics reflect vented barrel. ² Ammunition with “+P” or “+P+” on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer.

REMINGTON® DUTY SLUG SHELLS

Loads	Index IDI No.	Ramac No.	Gauge	Shell Length (in.)	Velocity (ft/sec)	Number of Pellets	Slug Weight	Rounds per Box	Boxes per Case	Rounds per Case
Sluggerr® Rifled Slug	SP12RS	20300	12	2 ¾	1560	—	1 oz. Rifled Slug	5	50	250
	SP12RSB(Blue Hull)	20279	12	2 ¾	1560	—	1 oz. Rifled Slug	5	50	250
	S12SRS	20302	12	2 ¾	1680	—	1 oz. Rifled Slug	5	50	250
	S12MRS	20270	12	3	1760	—	1 oz. Rifled Slug	5	50	250
Reduced Recoil Rifled Slug	RR12RS ¹	20298	12	2 ¾	1200	—	1 oz. Rifled Slug	25	10	250
	RR12RSB(Blue Hull) ¹	20285	12	2 ¾	1200	—	1 oz. Rifled Slug	5	50	250

¹ May not function in all types of autoloading shotguns.

REMINGTON® DUTY BUCKSHOT SHELLS

Loads	Index IDI No.	Ramac No.	Gauge	Shell Length (in.)	Dram Equiv.	Velocity (ft/sec)	Number of Pellets	Slug Weight	Rounds per Box	Boxes per Case	Rounds per Case
Reduced Recoil Buckshot	RR12BK00	20643	12	2 ¾	3	1200	9	00 Buck	25	10	250
	RR128B00	20645	12	3	2 ¾	1200	8	00 Buck	25	10	250
Buckshot	12B000	20406	12	2 ¾	3 ¾	1325	8	000 Buck	5	50	250
	12B00	20620	12	2 ¾	3 ¾	1325	9	00 Buck	5	50	250
	12B0	20622	12	2 ¾	3 ¾	1275	12	0 Buck	5	50	250
	12B1	20624	12	2 ¾	3 ¾	1250	16	1 Buck	5	50	250
	12B4	20626	12	2 ¾	3 ¾	1325	27	4 Buck	5	50	250
	SPL1200	20812	12	2 ¾	3 ¾	1325	9	00 Buck	25	10	250
Law Enforcement Buckshot	12SB00	20632	12	2 ¾	4	1290	12	00 Buck	5	50	250
	12HB000	20408	12	3	4	1225	10	000 Buck	5	50	250
	12HB00	20636	12	3	4	1225	15	00 Buck	5	50	250
	12HB4	20640	12	3	4	1225	41	4 Buck	5	50	250
TAC® 8 Buckshot	12BT800	20662	12	2 ¾	3 ¾	1325	8	00 Buck	5	50	250

DISINTEGRATOR® LEAD-FREE PLATED JACKETED, FRANGIBLE AMMUNITION (PISTOL & REVOLVER) (Packed 50 rounds per box, 10 boxes per case, 500 rounds per case)

Caliber	Index IDI No.	Ramac No.	Primer No.	Wt. (g.)	Bullet Style	VELOCITY (ft/sec)			ENERGY (ft./lbs.)			MID-RANGE TRAJECTORY (inch)		Barrel Length (inch)
						Muzzle	25 yds.	50 yds.	Muzzle	25 yds.	50 yds.	25 yds.	50 yds.	
357 Mag	LF357MA	23884	5 ½ LF	101	LF, Plated, Powdered Metal Core	1250	1175	1112	350	310	277	0.2	0.8	4V
9mm Luger (+P) ¹	LF9MMB	23858	1 ½ LF	101	LF, Plated, Powdered Metal Core (+P) ¹	1250	1175	1112	350	310	277	0.2	0.8	4
38 Special (+P) ¹	LF38SA	23880	1 ½ LF	101	LF, Plated, Powdered Metal Core (+P) ¹	950	922	896	202	191	180	0.4	1.2	4V
357 Sig	LF357SA	23878	5 ½ LF	104	LF, Plated, Powdered Metal Core	1345	1257	1181	418	365	322	0.2	0.7	4
40 S&W	LF40SWA	23864	5 ½ LF	141	LF, Plated, Powdered Metal Core	1135	1093	1056	403	374	349	0.2	0.9	4
45 Auto	LF45APA	23866	2 ½ LF	175	LF, Plated, Powdered Metal Core	1020	967	923	404	363	331	0.3	1.2	5

¹ Ammunition with (+P) on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer. 500 rounds per case.

DISINTEGRATOR® LEAD-FREE JACKETED, FRANGIBLE AMMUNITION (PISTOL & REVOLVER) (Packed 50 rounds per box, 10 boxes per case, 500 rounds per case)

Caliber	Index IDI No.	Ramac No.	Primer No.	Wt. (g.)	Bullet Style	VELOCITY (ft/sec)			ENERGY (ft./lbs.)			MID-RANGE TRAJECTORY (inch)		Barrel Length (inch)
						Muzzle	25 yds.	50 yds.	Muzzle	25 yds.	50 yds.	25 yds.	50 yds.	
9mm Luger (+P) ¹	FE9MMI	28358	1 ½ LF	101	LF, Jacketed, Powdered Metal Core (+P) ¹	1250	1175	1112	350	310	277	0.2	0.8	4
357 SIG	FE357S1	23886	5 ½ LF	104	LF, Jacketed, Powdered Metal Core	1345	1257	1181	418	365	322	0.2	0.7	4
40 S&W	FE40SW1	28360	5 ½ LF	141	LF, Jacketed, Powdered Metal Core	1135	1093	1056	403	374	349	0.2	0.9	4

¹ Ammunition with (+P) on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer. 500 rounds per case.

DISINTEGRATOR® LEAD-FREE JACKETED, FRANGIBLE AMMUNITION (RIFLE) (Packed 20 rounds per box, 10 boxes per case, 200 rounds per case)

Caliber	Index IDI No.	Ramac No.	Primer No.	Wt. (g.)	Bullet Style	VELOCITY (ft/sec)			ENERGY (ft./lbs.)			MID-RANGE TRAJECTORY (inch)	
						Muzzle	25 yds.	50 yds.	Muzzle	25 yds.	50 yds.	25 yds.	50 yds.
223 Remington	LF223RA ¹	23876	7 ½ HF	45	LF, Jacketed Powdered Metal Core	2700	2462	2235	728	605	499	0.2	0.7
	LF223RSB ²	23896	7 ½ HF	55	LF, Jacketed Powdered Metal Core	3240	3031	2831	1282	1122	979	0.0	0.5

¹ Ballistics are from a 14 ½" BBL (M4). ² Packed 50 rounds per box, 10 boxes per case, 500 rounds per case.

DISINTEGRATOR® SABOT SLUGS (LEAD-FREE, FRANGIBLE) (Packed 25 rounds per box, 10 boxes per case, 250 rounds per case)

Gauge	Index IDI No.	Ramac No.	Primer No.	Shell Length	Slug Wt. (oz.)	VELOCITY (ft/sec)			ENERGY (ft./lbs.)			MID-RANGE TRAJECTORY (inch)		
						Muzzle	25 yds.	50 yds.	Muzzle	25 yds.	50 yds.	25 yds.	50 yds.	100 yds.
12	LF12FSS25	20810	209 HMF	2 ¾"	¾	1815	1470	1203	936	1997	1310	877	531	3.0
12 (Reduced Recoil)	RRL12FSS25	20635	209 HMF	2 ¾"	¾	1700	1377	1140	911	1752	1149	788	503	3.3

HMF = Heavy-Metal-Free

DISINTEGRATOR® BUCKSHOT (LEAD-FREE, PLATED, FRANGIBLE) (Packed 25 rounds per box, 10 boxes per case, 250 rounds per case)

Gauge	Index IDI No.	Ramac No.	Primer No.	Shell Length (in.)	Velocity (ft/sec)	Buckshot Size	Pellet Count
12	LF12B00	20804	209 Heavy-Metal-Free	2 ¾	1600	00	8
12	LF129B00	20805	209 Heavy-Metal-Free	2 ¾	1550	00	9
12	LF12B4	20809	209 Heavy-Metal-Free	2 ¾	1450	4	27
12 (Reduced Recoil)	RRL12B00	20642	209 Heavy-Metal-Free	2 ¾	1300	00	8
12 (Reduced Recoil)	RRL129B00	20641	209 Heavy-Metal-Free	2 ¾	1250	00	9
12 (Reduced Recoil)	RRL12B4	20647	209 Heavy-Metal-Free	2 ¾	1200	4	27

UMC® LEADLESS CENTERFIRE PISTOL & REVOLVER AMMUNITION (Packed 25 rounds per box, 20 boxes per case, 500 rounds per case)

Caliber	Index IDI No.	Ramac No.	Primer No.	Wt. (g.)	Bullet Style	VELOCITY (ft/sec)			ENERGY (ft./lbs.)			MID-RANGE TRAJECTORY (in.)	
						Muzzle	25 yds.	50 yds.	Muzzle	25 yds.	50 yds.	25 yds.	50 yds.
9mm Luger	LL9MM11	23785	1 ½	115	Flat Nosed Metal Case w/Enclosed Base	1135	1084	1041	329	300	277	0.2	0.9
	LL9MM2	23811	1 ½	124	Flat Nosed Metal Case w/Enclosed Base	1100	1063	1030	333	311	292	0.2	0.9
	LL9MM9	23749	1 ½	147	Flat Nosed Metal Case w/Enclosed Base	990	964	941	320	304	289	0.3	1.1
357 Magnum	LL357MI	23808	5 ½	125	Flat Nosed Metal Case w/Enclosed Base	1450	1338	1240	583	497	427	0.1	0.6
380 Auto	LL380AP2	23805	1 ½	95	Flat Nosed Metal Case w/Enclosed Base	955	904	860	192	172	156	0.3	1.3
38 Special	LL38S17	23789	1 ½	125	Flat Nosed Metal Case w/Enclosed Base	850	836	822	201	194	188	0.3	1.4
38 Special (+P) ¹	LL38S2	23801	1 ½	125	Flat Nosed Metal Case w/Enclosed Base (+P) ¹	975	954	935	264	253	243	0.3	1.2
40 S&W	LL40SW5	23791	5 ½	180	Flat Nosed Metal Case w/Enclosed Base	985	959	935	388	367	350	0.3	1.2
45 Auto	LL45AP8	23793	2 ½	230	Flat Nosed Metal Case w/Enclosed Base	835	817	800	356	341	326	0.4	1.6

¹ Ammunition with "+P" on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer.

UMC® CENTERFIRE PISTOL & REVOLVER AMMUNITION (Packed 50 rounds per box, 10 boxes per case, 500 rounds per case)

Caliber	Index IDI No.	Ramac No.	Primer No.	Wt. (g.)	Bullet Style	VELOCITY (ft/sec)			ENERGY (ft./lbs.)			MID-RANGE TRAJECTORY (in.)	
						Muzzle	25 yds.	50 yds.	Muzzle	25 yds.	50 yds.	25 yds.	50 yds.
25 Auto Pistol (6.35mm)	L25AP	23716	1 ½	50	Metal Case	760	733	707	64	60	56	0.5	2.0
32 Auto (7.65mm)	L32AP	23704	1 ½	71	Metal Case	905	879	854	129	122	115	0.4	1.7
357 Magnum ¹	L357M12	23738	5 ½	125	Jacketed Soft Point	1450	1338	1240	583	497	427	0.1	0.6
9mm Luger	L9MM1	23752	1 ½	115	Jacketed Hollow Point	1155	1095	1046	341	306	280	0.2	0.9
	L9MM3	23728	1 ½	115	Metal Case	1135	1084	1041	329	300	277	0.2	0.9
	L9MM2	23718	1 ½	124	Metal Case	1100	1067	1030	339	314	292	0.2	1.0
	L9MM9	23732	1 ½	147	Metal Case	990	965	941	320	304	289	0.3	1.1
380 Auto	L380AP	23720	1 ½	95	Metal Case	955	904	860	192	172	156	0.3	1.3
38 Super Auto	L38SUP	23722	1 ½	130	Metal Case	1215	1152	1099	426	383	348	0.2	0.8
38 Special ¹ (+P) ²	L38S2	23754	1 ½	125	Semi-Jacketed Hollow Point (+P) ²	945	921	898	248	235	224	0.3	1.3
38 Special	L38S5	23724	1 ½	158	Lead Round Nose	755	739	723	200	191	183	0.5	2.1
	L38S11	23730	1 ½	130	Metal Case	800	787	775	185	179	173	0.3	1.7
10mm Auto	L10MM6	23706	2 ½	180	Metal Case	1150	1103	1063	528	486	451	0.2	0.9
357 SIG	L357S1	23734	5 ½	125	Metal Case	1350	1238	1146	506	425	365	0.2	0.7
	L357S2	23692	5 ½	125	Jacketed Hollow Point	1350	1245	1157	506	430	372	0.2	0.7
40 S&W	L40SW2	23694	5 ½	180	Jacketed Hollow Point	1015	986	960	412	388	368	0.3	1.1
	L40SW3	23742	5 ½	180	Metal Case	985	959	935	388	367	350	0.3	1.2
	L40SW4	23746	5 ½	165	Metal Case	1150	1089	1040	484	435	396	0.2	0.9
44 Remington Magnum ¹	L44MG7	23744	2 ½	180	Jacketed Soft Point	1610	1482	1366	1036	878	745	0.1	0.5
45 Auto	L45AP1	23818	2 ½	185	Metal Case	1015	981	951	423	395	371	0.3	1.1
	L45AP4	23726	2 ½	230	Metal Case	835	817	800	356	341	326	0.4	1.6
	L45AP7	23696	2 ½	230	Jacketed Hollow Point	835	817	800	356	341	326	0.4	1.6
45 GAP	L45GAP4	23691	2 ½	230	Metal Case	880	860	841	395	378	361	0.4	1.5

1 Note: These ballistics reflect vented barrel. 2 Ammunition with “+P” on the case headstamp is loaded to higher pressure. Use only in firearms designed for this cartridge and so recommended by the gun manufacturer.

REMINGTON® TARGET SHOTSHELLS

Loads	Index IDI No.	Ramac No.	Gauge	Shell Length (in.)	Dram Equiv.	Velocity (ft/sec)	Ounces of Shot	Shot Size	Rounds per Box	Boxes per Case	Rounds per Case
Target Loads	STS12L7	20110	12	2 ¾	2 ¾	1145	1 1/8	7 ½	25	10	250
	STS12L8	20112	12	2 ¾	2 ¾	1145	1 1/8	8	25	10	250
	STS12L85	20114	12	2 ¾	2 ¾	1145	1 1/8	8 ½	25	10	250
	STS12L9	20116	12	2 ¾	2 ¾	1145	1 1/8	9	25	10	250
	STS12LH7	20250	12	2 ¾	3	1200	1 1/8	7 ½	25	10	250
	STS12LH8	20252	12	2 ¾	3	1200	1 1/8	8	25	10	250

REMINGTON® RIMFIRE AMMUNITION (Packed 50 rounds per box, 100 boxes per case, 5000 rounds per case)

Product	Index IDI No.	Ramac No.	Wt. (g.)	Bullet Style	VELOCITY (ft/sec)			ENERGY (ft./lbs.)			MID-RANGE TRAJECTORY (in.)		
					Muzzle	50 yds.	100 yds.	Muzzle	50 yds.	100 yds.	50 yds.	100 yds.	150 yds.
Subsonic (Long Rifle)	SUB22HP	21140	38	Hollow Point	1050	965	901	93	79	69	0.3	0.0	-7.7
	SUB22HP ^{1,2}	21141	38	Hollow Point	1050	965	901	93	79	69	0.3	0.0	-7.7
Target, Standard Velocity (Long Rifle)	6122	21022	40	Round Nose	1150	1048	976	117	98	85	0.2	0.0	-6.4
	6100 ²	21284	40	Round Nose	1150	1048	976	117	98	85	0.2	0.0	-6.4
Thunderbolt, Hi-Speed (Long Rifle)	TB-22A	21238	40	Round Nose	1255	1113	1017	140	110	92	0.0	0.0	-5.6
Cyclone, Hi-Speed (Long Rifle)	CY-22HP	21222	36	Hollow Point	1280	1117	1010	131	100	82	0.0	0.0	-5.6
Golden Bullet, High Velocity (Long Rifle)	1522	21006	40	Plated, Lead Round Nose	1255	1113	1017	140	110	92	0.0	0.0	-5.6
	1500 ²	21276	40	Plated, Lead Round Nose	1255	1113	1017	140	110	92	0.0	0.0	-5.6
	1622	21008	36	Hollow Point	1280	1117	1010	131	100	82	0.0	0.0	-5.6
	1600 ²	21278	36	Hollow Point	1280	1117	1010	131	100	82	0.0	0.0	-5.6
	1622C ³	21250	36	Hollow Point	1280	1117	1010	131	100	82	0.0	0.0	-5.6
Golden Bullet, High Velocity (Short)	1022	21000	29	Round Nose	1095	982	903	77	62	52	0.3	0.0	-7.4
Yellow Jacket Hyper Velocity (Long Rifle)	1722	21074	33	Truncated Cone, Hollow Point	1500	1247	1075	165	114	85	-0.2	0.0	-4.1
	1700 ²	21280	33	Truncated Cone, Hollow Point	1500	1247	1075	165	114	85	-0.2	0.0	-4.1
Viper (Long Rifle)	1922	21080	36	Truncated Cone, Solid	1410	1198	1056	159	115	89	-0.1	0.0	-4.7
	1900 ²	21288	36	Truncated Cone, Solid	1410	1198	1056	159	115	89	-0.1	0.0	-4.7

1 Line of sight used us 1 ½” above the axis of the bore. 2 These long rifle .22s available in slide-open plastic packs of 100 rounds per box, 50 boxes per case, 5,000 rounds per case. 3 Packed 525 rounds per box, 12 boxes per case, 6,300 rounds per case.

GUN CARE



REM® OIL »

Cleans dirt and grime from exposed metal surfaces while displacing non-visible moisture from metal pores



REM® ACTION & SHOTGUN CLEANER »

Cleans trigger groups, gas ports, choke tube threading, receivers, chambers, barrels and magazine tubes



BRITE BORE™ SOLVENT »

Dissolves carbon and powder fouling, removes copper, lead and plastic deposits

FIREARM ACCESSORIES

MARS (MODULAR ACCESSORY RAIL SYSTEM) »

3-piece system that features a top rail for mounting the day optic and application of clip-on in-line night visions systems and 2 side rails that may be moved or removed as necessary to accommodate the mission and ancillary devices • Offered in both long- and short-action models to include degreed models • Comes complete with mounting screws, a Torx® wrench and instructions for mounting • May be used with any Remington 700™ based system such as the M24, 700P™ and 700P™ LTR



Model 870™ Police 12 ga/14" Parkerized Finish Modified with Bead Sight

EXTRA BARRELS » Original factory barrels with bead or rifle sights • Multiple choke constrictions • Durable factory finishes

MODEL 870™ & MODEL 11-87™ STOCK/FORE-END »

Available in black synthetic



MODEL 870 MAGAZINE EXTENSION KIT »

Available in: 20" Parkerized (3 shot) • 18" Parkerized (2 shot) • 14" Parkerized (1 shot) • 20" Blued (3 shot) • 18" Blued (2 shot)



SHOTGUN RETENTION DEVICE

The Shotgun Retention Device (SRD™) is designed for use with any Remington tactical shotgun. It allows the user to safely secure his weapon on a belt, body armor or even on any variety of hard surfaces. The SRD securely captures the shotgun using friction, which is user adjustable in addition to being ambidextrous. The SRD is constructed of an extremely durable thermoplastic and will deliver years of hard use.



Allows a Model 870™ to be held securely on the belt or body armor completely accessible for use • The SRD is made from highly durable Kydex that provides indefinite use • The SRD uses a friction retention system that can be adjusted by the user to suit his needs • The SRD is ambidextrous • For use with tactical shotguns • Can be mounted on tactical equipment, vehicles or any surface

Note: Unit is ambidextrous via the three mounting screws.

Remington®

www.remingtondefense.com

FIREARM ACCESSORIES

SUPERCCELL™ RECOIL PAD »


The world's most effective recoil pad. So potent, in fact, it single-handedly helped our Model 870™ generate up to 54 percent less recoil than our leading competitors' autoloading shotguns with factory pads. Its millions of tiny Super Cells absorb and release energy over a longer time period to create a more comfortable shooting experience than was ever before possible with conventional materials.




MSR™ MAGAZINES » 5, 7, and 10 round Teflon®-coated center feed single to double stack magazines for positive feeding • Removable insert to allow greater than standard overall cartridge lengths • Magazines are available in 338 Lapua Magnum (5 round and 10 round), 338 Norma Magnum (5 round and 10 round), 300 Winchester Magnum (7 round), and 7.62mm NATO (10 round)

INTEGRAL SCOPE MOUNTS » (MEDIUM & HIGH)

Medium

- Fits all Remington® Model 700™ rifles
- Fits 1" scope tube only
- Z-2 alloy construction – 50% stronger than aluminum
- Available in black and silver
- Made in the USA 

High

- Fits all Remington® Model 700™ rifles
- Fits 30mm scope tube without inserts or 1" with inserts
- Z-2 alloy construction – 50% stronger than aluminum
- Super strong design – base & lower ring all in one
- Available in black and silver
- Made in the USA 



**MODEL 11-87™
GAS SYSTEM KIT** » Genuine factory replacement parts • Nickel-plated piston/piston seal • Teflon® coated barrel seals



**UNIVERSAL
MAGAZINE CAP** » Fits all 12, 16 and 20 gauge Model 870s, Model 1100s and Model 11-87s • Allows you to add a sling to your Remington shotgun



CENTERFIRE MAGAZINE »

Model 700P™



**ADJUSTABLE
LENGTH OF PULL KIT** » Kit includes:

- Two ¼" LOP spacers
- One ½" LOP spacer
- Corresponding screw lengths to accommodate 3 different lengths



REMINGTON ARMORER'S SCHOOL

Our mission is to train personnel to repair and maintain the Remington® firearms used by operators, with courses limited to government personnel only. Our instructors have years of combined experience, and courses are presented at requested locations in the US and internationally. In-depth training includes:

- Disassembly and reassembly
- Troubleshooting
- Factory authorized modifications
- Inspection
- Service and repair

For more information, visit www.remingtondefense.com or give us a call at (800) 243-9700.



300, ADL, Accelerator, BDL, Bandit, Bore, BriteBore, Bronze Point, BuckHammer, Bullet, CBEE 22, CDL, Classic, Conquest, Copper-Lokt, Copper Solid, Core-Lokt, Custom Carry, Cyclone, D-Series, Deer Hunter, Disintegrator, DriLube, Driving Band, Duplex, Echo, Elite Hunter, ETA, EtronX, Excursion, Express, Express-Steel, EZ, F.A.S.T., Fast Action Soft Touch, Fieldmaster, Figure 8, Fireball, Flexitab, G3, Gamemaster, Genesis, Green Color, Golden, Golden Saber, Grizzly, Gun Club, Hi-Speed, Ideal, Kleanbore, Lead-Lokt, LV SF, M24, M24A2, M24A3, MAX Gobbler, M-Series, Managed-Recoil, Marine Magnum, MCS Picatinny, Model Five, Model Seven, Model 105 CTi, Model 11-87, Model 11-87P, Model 32, Model 332, Model 365, Model 40-X, Model 40-XB, Model 40-XBBR, Model 40-XC, Model 40-XR, Model 40-XRBR, Model 40-XS, Model 412, Model 504, Model 504-T, Model 552, Model 572, Model 597, Model 673, Model 700, Model 700P, Model 700P USR, Model 710, Model 750, Model 770, Model 798, Model 799, Model 830, Model 870 MCS, Model 870P MCS, Model 870P MAX, Model 1100, Model 7400, Model 7600, Model 7600P, Model 7615, Model 7615P, Model SP-10, Nitro 27, Nitro CLP, Nitro Mag, Nitro Turkey, Nitro-Steel, Parker, Peters, Pheasant, Power-Lokt, Power Piston, Premier, ProBore, Quick Look, R, R-P, R3 and R3 logo, Rangemaster, Ready, Realwood, Rem, Rem Dri 35, Rem DriLube, RemCloth, RemGrip, Rem-Line, Rem-Lite, Rem-Tech, Remington, Remington Fieldmaster, Remington Law Enforcement, Remington Leadless, Remington Racing, Remington Shooting School and Remington Shooting School logo, Remington Targetmaster, Remington Ultra, Rustless, S.A.S.S., Sendero, ShurShot, Slugger, SP, SPR, SPR18, SPR100, SPR210, SPR22, SPR220, SPR310, SPR310S, SPR453, SPR84, SPS, SP-T, SPS-T, Speedmaster, Sportsman, STS, Subsonic, Super Magnum, SWIFT-LOKT, TAC 8, Tango, Targetmaster, Thunderbolt, TorchCam, TriNyte, Ultra Bonded, Ultra Mag, UMC, Unibody, Viper, VLS, Vortex and Vortex logo, VS, VSF, VS SF, Weathermaster, Wetproof, Wingmaster, Wingmaster HD, Woodsmaster, XCR Extreme, X-Mark Pro, XR-100, Yellow Jacket and Zulu are trademarks of RA Brands, L.L.C., Madison, NC 27025. Badger Ordnance is a trademark of Badger Ordnance. Palusol is a trademark of BASF. V-Tac is a trademark of Blackhawk Products Group. Briley is a trademark of Briley Manufacturing. Bushnell and Sharpshooter are trademarks of Bushnell. Delrin, Kevlar, Teflon and Tyvek are trademarks of DuPont. Sierra Match King is a trademark of Sierra Bullet Co. Swift, A-Frame and Scirocco are trademarks of Swift Bullet Co. Break-Up, Brush, Duck Blind, Mossy Oak, New Break-Up and Obsession are trademarks of Haas Outdoors, Inc. Hardigg is a trademark of Hardigg Industries, Inc. V-Max is a trademark of Hornady Manufacturing Company. Hogue is a trademark of Hogue, Inc. Advantage, Advantage Max-4, Advantage Timber, AP, APG, HD and Realtree are trademarks of Jordan Outdoor Enterprises, Ltd. BreachersGrip, CompStock Recoil Reducer and SpecOps are trademarks of Knoxville Industries, LLC. Leupold is a trademark of Leupold & Stevens, Inc. McMillian is a trademark of McMillan Rifle Co. Butler Creek and Uncle Mike's are trademarks of Michaels of Oregon Co. Lapua is a trademark of Nammo Lap XS Sight Systems, Inc. HiViz is a trademark of North Pass, Ltd. Pelican is a trademark of Pelican Products, Inc. Kraton is a trademark of Shell. Sako is a trademark of Sako, Ltd., Shilen is a trademark of Shilen, Inc., Speedfeed is a trademark of Speedfeed, Inc. LimbSaver is a trademark of Steven Sims, Inc. TRUGLO is a trademark of Truglo, Inc. Skyline, Excel and Fall Flight are trademarks of Skyline Cover, LLC. Turner AWS is a trademark of Turner Saddlery. Weaver is a trademark of Weaver Outdoor Optics. Williams and Fire Sights are trademarks of Williams Gun Sight Co.

Weights, stock dimensions, checkering pattern and wood grain may vary according to the individual firearm. Remington reserves the right to change or modify its products without notice. Pricing may vary by model, specification, color, size and availability. Follow the safety rules printed in firearms instruction books and on ammunition boxes. If you do not have an instruction book for your Remington firearm, write to Remington Arms Company, Inc., Military, Law Enforcement, Technologies and Federal Agency Sales Divisions, 870 Remington Drive, PO Box 700, Madison, NC 27025, for a free copy or visit our website at www.remington.com/manuals. Please specify the model and serial number. The firearms herein have been photographed with their actions closed to properly showcase their features. In actual practice, any firearm not in use must be left with ammunition removed, action open and safety on. Consumer Information, Arms Service, Parts and Repairs and Custom Shop: (800) 243-9700. Visit us on the web at: www.remingtondefense.com.

OUR MISSION.

Remington® is committed to the men and women serving our country in roles of distinction within the Military, Federal Agency, and Law Enforcement communities. Our mission is to provide seamless, time-sensitive support to government entities seeking our products and to develop new products that meet the needs of these customers as requirements change. We will do this by fielding a professionally trained and supported staff who are technical experts in our products and in the small arms marketplace, well educated in how to get you what you need through government acquisition processes, and responsive to your needs and desires.

Remington®

www.remingtondefense.com

Remington®

DEFENSE

REMINGTON ARMS CO., INC.
Defense Products

870 Remington Drive
P.O. Box 700
Madison, NC 27025-0700
Phone: 336-548-8899
Fax: 336-548-7800

www.remingtondefense.com



Ammunition represented in this catalog is produced by Remington Arms Co., Inc., at an ISO9001:2000 Registered Facility located in Lonoke, Arkansas. Remington longarms are manufactured to the highest quality and performance standards, providing reliability, safety, performance, durability, and long service life.

©2011 Remington Arms Company, Inc.
RM2125