



HATSAN ARMS COMPANY



HATSAN PCP AIR RIFLES



HATSAN PCP Air Rifles

Contents

PAGE

4



BT65 SB-W

PAGE

6



BT65 SB

PAGE

8



BT65 RB-W

PAGE

10



BT65 RB

PAGE

12



AT44 W-10

PAGE

14



AT44-10

PAGE

16



AT44 S-10

PAGE

18



AT44 PA

PAGE

20



AT44 W

PAGE

22



AT44

PAGE

24



AT44 S

PAGE

26



PCP Accessories



10-Shot, Side Bolt Models

1250fps POWER!



BT65 SB-W



Comes in its box with a sling.

SPECIFICATIONS

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
BT65 SB-W (Side Bolt)	4.5mm / .177cal	380m/s (1250fps)	40	30	10	255cc	200 BAR	70	Genuine Turkish walnut, montecarlo cheekpiece, adjustable butt pad & adjustable comb	1080mm (42.5")	580mm (22.8")	4.3kg (9.4lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	360m/s (1180fps)	61	45	10	255cc	200 BAR	70						
	6.35mm / .25cal	330m/s (1090fps)	71	52	9	255cc	200 BAR	65						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.

* The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



- Side bolt action
- Manual Safety
- Scope mount rail good for both 11mm and 22mm scope mounts
- 10-shot magazine (9-shot magazine in .25 / 6.35mm caliber)
- Micro adjustable rear sight with Truglo fiber optics

- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade



- Elevation adjustable comb which can be easily adjusted by a coin.
- Stock length of pull, elevation & fit angle adjustable rubber butt pad.



TRUGLO
Adjustable front sight

1/2" UNF threaded muzzle and fitted muzzle cap.

Detachable 255cc air cylinder for 200 bar fill pressure with built in pressure gauge.

- 10- shot, manual loading, side bolt action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Genuine Turkish walnut ambidextrous stock with montecarlo cheekpiece
- Elevation adjustable comb which can be easily adjusted by a coin.
- Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in 25 (6.35mm) caliber.
- Comes with an extra magazine in the box.
- Aluminum material detachable air cylinder tube (255cc) enabling to use spare air cylinders.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.

- Standard quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Resettable Manual Safety.
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- Comes in its box with a sling.



10-Shot, Side Bolt Models

1250fps POWER!



BT65 SB

- 10-shot, manual loading, side bolt action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Ambidextrous & ergonomic design synthetic stock.
- Integrated picatinny rail beneath the forearm.
- Soft rubber inlays on grip and forearm for better control and feel.
- Elevation adjustable comb which can be easily adjusted by a coin.
- Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in 25 (6.35mm) caliber.
- Comes with an extra magazine in the box.
- Aluminum material detachable air cylinder tube (255cc) enabling to use spare air cylinders.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Standard quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Resetttable Manual Safety
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- Comes in its box with a sling & bipod.



Comes in its box with a bipod




Comes in its box with a sling.

QUATTRO TRIGGER



- Side bolt action
- Manual Safety
- Scope mount rail good for both 11mm and 22mm scope mounts
- 10-shot magazine (9-shot magazine in .25 /6.35mm caliber)
- Micro adjustable rear sight with Truglo fiber optics

- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade

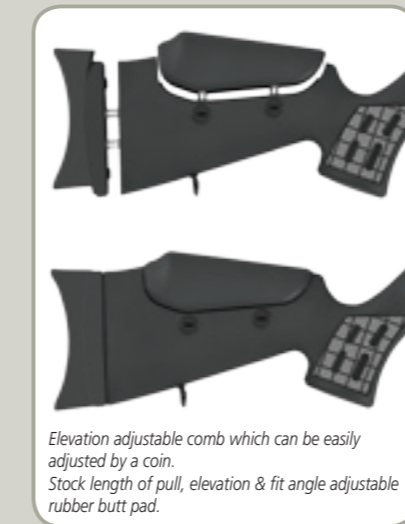

Elevation adjustable comb which can be easily adjusted by a coin.
Stock length of pull, elevation & fit angle adjustable rubber butt pad.



TRUGLO
Adjustable front sight

1/2" UNF threaded muzzle and fitted muzzle cap.

Detachable 255cc air cylinder for 200 bar fill pressure with built in pressure gauge.



BT65 SB - CAMO
Mossy Oak New Break Up finish version

BT65 SB - MW
Luxurious walnut woodgrain finish version

SPECIFICATIONS

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
BT65 SB (Side Bolt)	4.5mm / .177cal	380m/s (1250fps)	40	30	10	255cc	200 BAR	70	Advanced polymer, montecarlo cheekpiece, adjustable butt pad & adjustable comb	1080mm (42.5")	580mm (22.8")	4.1kg (9lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	360m/s (1180fps)	61	45	10	255cc	200 BAR	70						
	6.35mm / .25cal	330m/s (1090fps)	71	52	9	255cc	200 BAR	65						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
* The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



10-Shot, Rear Bolt Models

1250fps POWER!




NEW

BT65 RB-W



- 10- shot, manual loading, rear bolt action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Genuine Turkish walnut ambidextrous stock with montecarlo cheekpiece
- Elevation adjustable comb which can be easily adjusted by a coin.
- Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in 25 (6.35mm) caliber.
- Comes with an extra magazine in the box.
- Aluminum material detachable air cylinder tube (255cc) enabling to use spare air cylinders.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Standard quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Resettable Manual & Automatic Safety
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- Comes in its box with a sling.

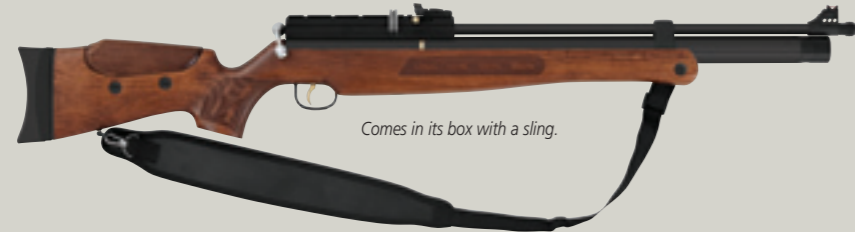

Comes in its box with a sling.

SPECIFICATIONS

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
BT65 RB-W (Rear Bolt)	4.5mm / .177cal	380m/s (1250fps)	40	30	10	255cc	200 BAR	70	Genuine Turkish walnut, montecarlo cheekpiece, adjustable butt pad & adjustable comb	1080mm (42.5")	580mm (22.8")	4.3kg (9.4lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	360m/s (1180fps)	61	45	10	255cc	200 BAR	70						
	6.35mm / .25cal	330m/s (1090fps)	71	52	9	255cc	200 BAR	65						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



- Rear bolt action
- Manual Safety
- Scope mount rail good for both 11mm and 22mm scope mounts
- 10-shot magazine (9-shot magazine in .25/6.35mm caliber)
- Micro adjustable rear sight with Truglo fiber optics



Elevation adjustable comb which can be easily adjusted by a coin.
 Stock length of pull, elevation & fit angle adjustable rubber butt pad.



TRUGLO Adjustable front sight
 1/2" UNF threaded muzzle and fitted muzzle cap.
 Detachable 255cc air cylinder for 200 bar fill pressure with built in pressure gauge.

- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade





10-Shot, Rear Bolt Models

1250fps POWER!



BT65 RB

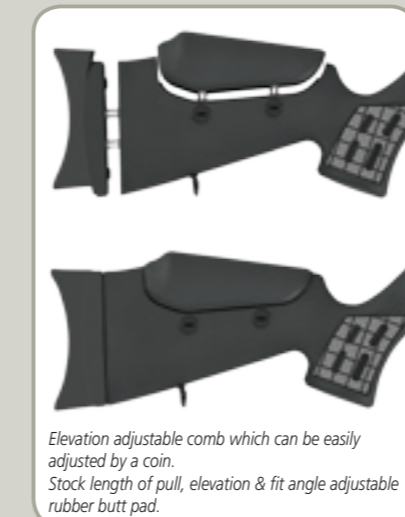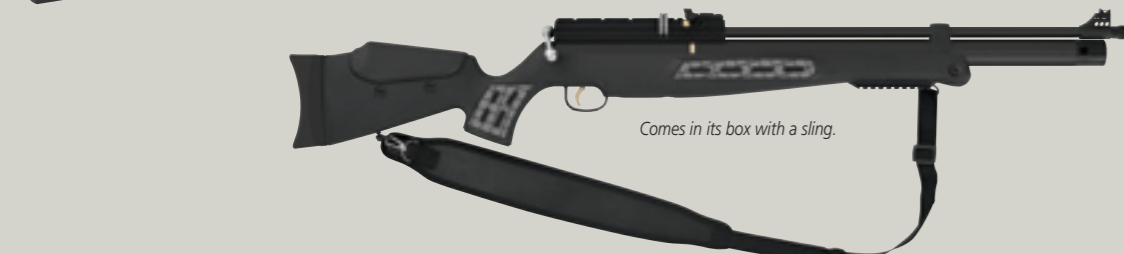

- 10-shot, manual loading, rear bolt action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Ambidextrous & ergonomic design synthetic stock.
- Integrated picatinny rail beneath the forearm.
- Soft rubber inlays on grip and forearm for better control and feel.
- Elevation adjustable comb which can be easily adjusted by a coin.
- Stock length of pull, elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in 25 (6.35mm) caliber.
- Comes with an extra magazine in the box.
- Aluminum material detachable air cylinder tube (255cc) enabling to use spare air cylinders.

- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Standard quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Resettable Manual & Automatic Safety
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- Fitted sling swivels.
- Comes in its box with a sling & bipod.

SPECIFICATIONS

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
BT65 RB (Rear Bolt)	4.5mm / .177cal	380m/s (1250fps)	40	30	10	255cc	200 BAR	70	Advanced polymer, montecarlo cheekpiece, adjustable butt pad & adjustable comb	1080mm (42.5")	580mm (22.8")	4.1kg (9lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	360m/s (1180fps)	61	45	10	255cc	200 BAR	70						
	6.35mm / .25cal	330m/s (1090fps)	71	52	9	255cc	200 BAR	65						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
* The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.





10-Shot, Side Lever Models

1070 fps POWER!



AT44W-10



- 10-shot, manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
 - Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
 - Available in .177 (4.5 mm), .22 (5.5 mm) and .25 (6.35 mm) caliber.
 - Genuine Turkish walnut ambidextrous stock with montecarlo cheekpiece.
 - Elevation & fit angle adjustable rubber butt pad.
 - Detachable 10-shot rotary magazine in .177 (4.5 mm) and .22 (5.5 mm) calibers and 9-shot rotary magazine in 25 (6.35 mm) caliber.
 - Comes with an extra magazine in the box.
 - Detachable air cylinder tube (180 cc) enabling to use spare air cylinders.
 - Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
 - Standard quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Dovetail groove receiver for both 11 mm and 22 mm scope mounts.
 - Overall blued finish, black anodized receiver.
 - Resettable Manual & Automatic Safety.
 - "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
 - Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
 - Adjustable rear & front sight with Truglo fiber optics.
 - Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
 - Gold plated metal trigger & metal trigger guard.
 - **Long version available (AT44W-10 Long) with 230 cc air cylinder tube, 58 cm barrel and 100 fps (30 m/s) more muzzle velocity.**

SPECIFICATIONS

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
AT44W-10	4.5mm / .177cal	325m/s (1070fps)	30	22	10	180cc	200 BAR	80	Genuine Turkish walnut, montecarlo cheekpiece, adjustable butt pad.	1000mm (39.4")	495mm (19.4")	3.6kg (7.9lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	295m/s (970fps)	42	31	10	180cc	200 BAR	70						
	6.35mm / .25cal	265m/s (870fps)	46	34	9	180cc	200 BAR	60						
AT44W-10 Long	4.5mm / .177cal	355m/s (1170fps)	36	27	10	230cc	200 BAR	80	Genuine Turkish walnut, montecarlo cheekpiece, adjustable butt pad.	1085mm (42.7")	580mm (22.8")	4kg (8.8lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	325m/s (1070fps)	51	38	10	230cc	200 BAR	70						
	6.35mm / .25cal	295m/s (970fps)	57	42	9	230cc	200 BAR	60						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.

- Manual & Auto Safety.
- Scope mount rail good for both 11 mm and 22 mm scope mounts.
- 10-shot magazine (9-shot magazine in .25/6.35mm caliber)
- Micro adjustable rear sight.



- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade



Elevation & fit angle adjustable rubber butt pad.



TRUGLO
Adjustable front sight

1/2" UNF threaded muzzle and fitted muzzle cap.

Detachable 180cc air cylinder for 200 bar fill pressure with built in pressure gauge. (230cc air cylinder in long version).



AT44WX-10

Fixed sound moderator equipped version with no sights. Hatsan recommends Optima 3-12x44AOE scope with AT44WX-10.

AT44W-10 Long

Long version with 230 cc air cylinder tube, 58 cm barrel and 100 fps (30 m/s) more muzzle velocity.



10-Shot, Side Lever Models

1070 fps POWER!



AT44-10

- 10-shot, manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Thumbhole synthetic ambidextrous stock with montecarlo cheekpiece.
- Elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in 25 (6.35mm) caliber.
- Comes with an extra magazine in the box.
- Detachable air cylinder tube (180cc) enabling to use spare air cylinders.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Standard quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Resettable Manual & Automatic Safety
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- **Long version (AT44-10 Long) available with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity.**



SPECIFICATIONS

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
AT44-10	4.5mm / .177cal	325m/s (1070fps)	30	22	10	180cc	200 BAR	80	Advanced polymer, thumbhole, montecarlo cheekpiece, adjustable butt pad.	1000mm (39.4")	495mm (19.4")	3.3kg (7.3lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	295m/s (970fps)	42	31	10	180cc	200 BAR	70						
	6.35mm / .25cal	265m/s (870fps)	46	34	9	180cc	200 BAR	60						
AT44-10 Long	4.5mm / .177cal	355m/s (1170fps)	36	27	10	230cc	200 BAR	80	Advanced polymer, thumbhole, montecarlo cheekpiece, adjustable butt pad.	1085mm (42.7")	580mm (22.8")	3.70kg (8.1lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	325m/s (1070fps)	51	38	10	230cc	200 BAR	70						
	6.35mm / .25cal	295m/s (970fps)	57	42	9	230cc	200 BAR	60						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



- Manual & Auto Safety.
- Scope mount rail good for both 11 mm and 22 mm scope mounts.
- 10-shot magazine (9-shot magazine in .25 / 6.35mm caliber)
- Micro adjustable rear sight.

- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade



Elevation & fit angle adjustable rubber butt pad.



TRUGLO Adjustable front sight
 1/2" UNF threaded muzzle and fitted muzzle cap.
 Detachable 180cc air cylinder for 200 bar fill pressure with built in pressure gauge. (230cc air cylinder in long version).



AT44X-10

Fixed sound moderator equipped version with no sights. Hatsan recommends Optima 3-12x44AOE scope with AT44X-10. AT44X-10 is also available in Camo and MW finish versions.

AT44-10 CAMO

Mossy Oak New Break Up Mossy Oak New Break Up finish version.

AT44-10 MW

Stock luxurious walnut woodgrain camouflage version.

AT44-10 Long

Long version with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity. Available in Camo and MW finish versions.



10-Shot, Side Lever Models



1070 fps POWER!


AT44S-10

- 10-shot, manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Stylish and ergonomic design ambidextrous synthetic stock with montecarlo cheekpiece.
- Elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in 25 (6.35mm) caliber.
- Comes with an extra magazine in the box.
- Detachable air cylinder tube (180cc) enabling to use spare air cylinders.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Standard quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Resettable Manual & Automatic Safety
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- **Long version (AT44S-10 Long) available with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity.**



AT44SX-10

Fixed sound moderator equipped version with no sights. Hatsan recommends Optima 3-12X44ADE scope with AT44SX-10. AT44SX-10 is also available in Camo and MW finish versions.

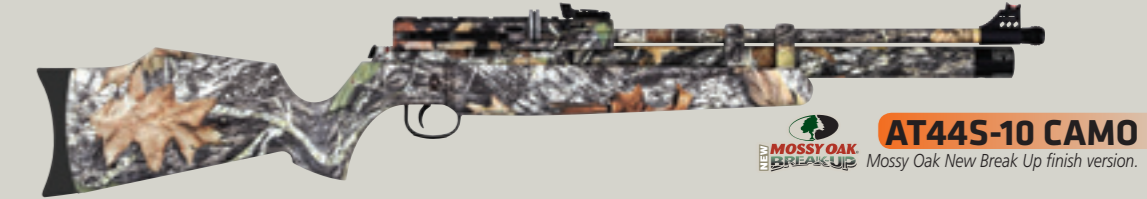

AT44S-10 CAMO

Mossy Oak New Break Up finish version.



AT44S-10 MW

Stock luxurious walnut woodgrain camouflage version.



AT44S-10 Long

Long version with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity. Available in Camo and MW finish versions.

SPECIFICATIONS

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
AT44S-10	4.5mm / .177cal	325m/s (1070fps)	30	22	10	180cc	200 BAR	80	Advanced polymer, montecarlo cheekpiece, adjustable butt pad.	1000mm (39.4")	495mm (19.4")	3.2kg (7lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	295m/s (970fps)	42	31	10	180cc	200 BAR	70						
	6.35mm / .25cal	265m/s (870fps)	46	34	9	180cc	200 BAR	60						
AT44S-10 Long	4.5mm / .177cal	355m/s (1170fps)	36	27	10	230cc	200 BAR	80	Advanced polymer, montecarlo cheekpiece, adjustable butt pad.	1085mm (42.7")	580mm (22.8")	3.6kg (7.9lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	325m/s (1070fps)	51	38	10	230cc	200 BAR	70						
	6.35mm / .25cal	295m/s (970fps)	57	42	9	230cc	200 BAR	60						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



- Manual & Auto Safety.
- Scope mount rail good for both 11 mm and 22 mm scope mounts.
- 10-shot magazine (9-shot magazine in .25 /6.35mm caliber)
- Micro adjustable rear sight.

- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade



Elevation & fit angle adjustable rubber butt pad.



TRUGLO Adjustable front sight

1/2" UNF threaded muzzle and fitted muzzle cap.

Detachable 180cc air cylinder for 200 bar fill pressure with built in pressure gauge. (230cc air cylinder in long version).



10-Shot, Pump Action Models

1070 fps POWER!



AT44 PA



- 10-shot, manual loading, pump action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Thumbhole synthetic ambidextrous stock with montecarlo cheekpiece.
- Elevation & fit angle adjustable rubber butt pad.
- Detachable 10-shot rotary magazine in .177 (4.5mm) and .22 (5.5mm) calibers and 9-shot rotary magazine in 25 (6.35mm) caliber.
- Comes with extra magazine in the box.
- Detachable air cylinder tube (180cc) enabling to use spare air cylinders.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Standard quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Resettable Manual Safety
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- **Long version (AT44-10 Long) available with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity.**

SPECIFICATIONS

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
AT44 PA	4.5mm / .177cal	325m/s (1070fps)	30	22	10	180cc	200 BAR	80	Advanced polymer, thumbhole, montecarlo cheekpiece, adjustable butt pad.	1000mm (39.4")	495mm (19.4")	3.8kg (8.4lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	295m/s (970fps)	42	31	10	180cc	200 BAR	70						
	6.35mm / .25cal	265m/s (870fps)	46	34	9	180cc	200 BAR	60						
AT44 PA Long	4.5mm / .177cal	355m/s (1170fps)	36	27	10	230cc	200 BAR	80	Advanced polymer, thumbhole, montecarlo cheekpiece, adjustable butt pad.	1085mm (42.7")	580mm (22.8")	4.4kg (9.7lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	325m/s (1070fps)	51	38	10	230cc	200 BAR	70						
	6.35mm / .25cal	295m/s (970fps)	57	42	9	230cc	200 BAR	60						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



- Manual Safety.
- Scope mount rail good for both 11 mm and 22 mm scope mounts.
- 10-shot magazine (9-shot magazine in .25 /6.35mm caliber)
- Micro adjustable rear sight.

- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade



Elevation & fit angle adjustable rubber butt pad.



Adjustable front sight
 1/2" UNF threaded muzzle and fitted muzzle cap.
 Detachable 180cc air cylinder for 200 bar fill pressure with built in pressure gauge. (230cc air cylinder in long version).



AT44PAX

Fixed sound moderator equipped version with no sights. Hatsan recommends Optima 3-12x44AOE scope with AT44PAX. Available in Camo and MW finish versions.

AT44PALong

Long version with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity. Available in Camo and MW finish versions.



Single Shot, Side Lever Models

1070 fps POWER!



AT44 W



- Single shot, manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Genuine Turkish walnut ambidextrous stock with montecarlo cheekpiece.
- Elevation & fit angle adjustable rubber butt pad.
- Detachable air cylinder tube (180cc) enabling to use spare air cylinders.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Standard quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Resettable Manual & Automatic Safety
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- **Long version available (AT44W Long) with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity.**

SPECIFICATIONS

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
AT44 W	4.5mm / .177cal	325m/s (1070fps)	30	22	1	180cc	200 BAR	80	Genuine Turkish walnut, montecarlo cheekpiece, adjustable butt pad.	1000mm (39.4")	495mm (19.4")	3.4kg (7.5lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	295m/s (970fps)	42	31	1	180cc	200 BAR	70						
	6.35mm / .25cal	265m/s (870fps)	46	34	1	180cc	200 BAR	60						
AT44 W Long	4.5mm / .177cal	355m/s (1170fps)	36	27	1	230cc	200 BAR	80	Genuine Turkish walnut, montecarlo cheekpiece, adjustable butt pad.	1085mm (42.7")	580mm (22.8")	3.8kg (8.3lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	325m/s (1070fps)	51	38	1	230cc	200 BAR	70						
	6.35mm / .25cal	295m/s (970fps)	57	42	1	230cc	200 BAR	60						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade

Detachable 180cc air cylinder for 200 bar fill pressure with built in pressure gauge. (230cc air cylinder in long version).



Single Shot, Side Lever Models

1070 fps POWER!



AT44

- Single shot, manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Thumbhole synthetic ambidextrous stock with montecarlo cheekpiece.
- Elevation & fit angle adjustable rubber butt pad.
- Detachable air cylinder tube (180cc) enabling to use spare air cylinders.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Standard quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Resettable Manual & Automatic Safety
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- **Long version (AT44 Long) available with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity.**



AT44X

Fixed sound moderator equipped version with no sights. Hatsan recommends Optima 3-12x44AOE scope with AT44X. AT44X is also available in Camo and MW finish versions.



AT44 CAMO

Mossy Oak New Break Up finish version.



AT44 MW

Stock luxurious walnut woodgrain camouflage version.



AT44 Long

Long version with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity. Available in Camo and MW finish versions.

SPECIFICATIONS

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
AT44	4.5mm / .177cal	325m/s (1070fps)	30	22	1	180cc	200 BAR	80	Advanced polymer, thumbhole, montecarlo cheekpiece, adjustable butt pad.	1000mm (39.4")	495mm (19.4")	3.1kg (6.8lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	295m/s (970fps)	42	31	1	180cc	200 BAR	70						
	6.35mm / .25cal	265m/s (870fps)	46	34	1	180cc	200 BAR	60						
AT44 Long	4.5mm / .177cal	355m/s (1170fps)	36	27	1	230cc	200 BAR	80	Advanced polymer, thumbhole, montecarlo cheekpiece, adjustable butt pad.	1085mm (42.7")	580mm (22.8")	3.5kg (7.7lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	325m/s (1070fps)	51	38	1	230cc	200 BAR	70						
	6.35mm / .25cal	295m/s (970fps)	57	42	1	230cc	200 BAR	60						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.



- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated trigger blade



Elevation & fit angle adjustable rubber butt pad.



TRUGLO
Adjustable front sight

1/2" UNF threaded muzzle and fitted muzzle cap.

Detachable 180cc air cylinder for 200 bar fill pressure with built in pressure gauge. (230cc air cylinder in long version).



Single Shot, Side Lever Models

1070 fps POWER!



AT44 S

- Single shot, manual loading, side lever action, pre-charged pneumatic (PCP) air rifle.
- Precision rifled choked barrel for accuracy, threaded for 1/2" UNF sound moderator & fitted muzzle cap.
- Available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) caliber.
- Stylish and ergonomic design ambidextrous synthetic stock with montecarlo cheekpiece.
- Elevation & fit angle adjustable rubber butt pad.
- Detachable air cylinder tube (180cc) enabling to use spare air cylinders.
- Built-in pressure gauge on the air cylinder to monitor the cylinder pressure.
- Standard quick-fill nozzle & air cylinder discharging cap supplied in the box.
- Dovetail groove receiver for both 11mm and 22mm scope mounts.
- Overall blued finish, black anodized receiver.
- Resettable Manual & Automatic Safety
- "Anti-double pellet feed" mechanism preventing more than one pellet loading into barrel.
- Patented anti-knock system to prevent gas wastage when rifle is knocked or bounced.
- Adjustable rear & front sight with Truglo fiber optics.
- Quattro Trigger: 2-stage full adjustable match trigger for trigger travel and trigger load.
- Gold plated metal trigger & metal trigger guard.
- **Long version (AT44S-10 Long) available with 230cc air cylinder tube, 58cm barrel and 100fps (30m/s) more muzzle velocity.**

SPECIFICATIONS

Model	Caliber	Max. Muzzle Velocity (*)	Energy (*)		Magazine Capacity	Air Tube Volume	Fill Pressure	Shots per fill	Stock	Overall Length	Barrel Length	Weight	Fiber Optic Sights Diameters	
			Joules	ft.lbs									Rear Sight	Front Sight
AT44 S	4.5mm / .177cal	325m/s (1070fps)	30	22	1	180cc	200 BAR	80	Advanced polymer, montecarlo cheekpiece, adjustable butt pad.	1000mm (39.4")	495mm (19.4")	3kg (6.6lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	295m/s (970fps)	42	31	1	180cc	200 BAR	70						
	6.35mm / .25cal	265m/s (870fps)	46	34	1	180cc	200 BAR	60						
AT44 S Long	4.5mm / .177cal	355m/s (1170fps)	36	27	1	230cc	200 BAR	80	Advanced polymer, montecarlo cheekpiece, adjustable butt pad.	1085mm (42.7")	580mm (22.8")	3.4kg (7.5lbs)	0.9mm (.035") green	1.5mm (.060") red
	5.5mm / .22cal	325m/s (1070fps)	51	38	1	230cc	200 BAR	70						
	6.35mm / .25cal	295m/s (970fps)	57	42	1	230cc	200 BAR	60						

* Above maximum muzzle velocity figures may differ depending on the pellet weight & shape.
 * The energy restriction of a particular country can be achieved by the reduction in the muzzle velocity. The above maximum velocity figures are obtained when there is no energy restriction on the air rifle and when measured at optimum pressure value in the air tube. As a nature of PCP air rifles the velocity starts low at maximum pressure level in the air tube, then starts to increase and gets to the maximum at optimum pressure value in the air tube; and then it starts to decrease again as the pressure in the air cylinder gets too low.





PCP Accessories



Sound Moderator

- Reduces the sound significantly.
- 1/2" UNF threaded and easily mountable on the muzzle.
- Made of aluminum alloy and light in weight.



Extended Muzzle Break

- Extended & ported muzzle break for a different look.
- 1/2" UNF threaded and easily mountable on the muzzle.



Air Stripper

Air stripper helps to get better accuracy and grouping by decreasing the air turbulence at the muzzle as the pellet leaves the muzzle.



Hatsan Hand Pump

- The most convenient and affordable way to charge your PCP air rifle.
- Maximum 250 bar fill pressure.
- Ergonomically designed handle with synthetic cover.
- Built-in moisture trap embedded in the handle which traps the moisture and protects your pump & air rifle.
- Built-in particle filter embedded in the handle which traps the dust & dirt and protects your pump & air rifle.
- Additional compartment in the left handle where you can put spare parts and O-rings of the pump or small belongings.
- Built-in precise pressure gauge embedded in the frame which protects it from external impacts.
- Easily demountable design.
- Specialist design wide foot plate with adjustable pumping angle.
- Comes with hose and connector.

Additional Compartment

Built-in moisture trap & particle filter

Hatsan Charging Kit

Designed to fill air into the air cylinder of your PCP from scuba tanks. The quickest method to fill your PCP.



Air Tube Cylinder

- Detachable air cylinder
- Maximum fill pressure 200 bar.
- Easily screws in to the all Hatsan AT44 PCP series air rifles.
- Possibility of refilling the air tube while on the rifle or detached.



10-shot Magazine


- Easily mounts to all 10-shot AT44 PCP series air rifles.
- Light in weight and made of aluminum.
- Spare 10-shot magazines are available in .177 (4.5mm) and .22 (5.5mm) calibers.
- Spare 9-shot magazines are available in .25 (6.35mm) caliber

Hatsan Pointed Head Pellets

High performance, accurate and precise for pest control and precision shooting at larger distances. Pointed head & waisted design lead pellets providing maximum penetration on the target. Recommended to use on Hatsan products. Hatsan pointed head pellets are available in .177 (4.5mm), .22 (5.5mm) and .25 (6.35mm) calibers.



- .177 (4.5mm) caliber Hatsan pointed head pellets. 200 pellets per tin. Weight: 0.545grams / 8.41grains.
- .22 (5.5mm) caliber Hatsan pointed head pellets. 300 pellets per tin. Weight: 0.910 grams / 14grains.
- .25 (6.35mm) caliber Hatsan pointed head pellets. 200 pellets per tin. Weight: 1,61grams / 24,85 grains.



Red illuminated reticle

OPTiMA 3-12x44AOE Scope

- Adjustable objective, red illuminated reticle, aluminum frame scope. Comes with 11mm ring mounts.

SPECIFICATIONS

Model	Magnification OBJ.DIA.	Objective Diameter	Tube Diameter	Exit Pupil	Field of View	Eye Relief	Length	Weight
Optima 3-12x44AOE Scope	3X-12X	44 mm 1.7"	25.4 mm 1"	14.6 - 3.67 0.57" - 0.14"	7.32' - 33.63'	82-87 mm 3.22"-3.4"	330 mm 12.9"	500 grams 17.6 ounce

Hatsan Torpedo Pellets

Outmost penetrative and bullet shaped design providing supremely accurate results on target. The large dome makes a larger hole while the thinner body ensures less friction so the pellet will penetrate further for the same amount of power. 26% better penetrative power than a domed pellet and 14% better than a pointed diablo pellet. Recommended to use on Hatsan products. Hatsan Torpedo pellets are available in .177 (4.5 mm) and .22 (5.5 mm).



- .177 (4.5mm) caliber Hatsan Torpedo pellets. 450 pellets per box. Weight: 0.62grams / 9.5grains.
- .22 (5.5mm) caliber Hatsan Torpedo pellets. 350 pellets per box. Weight: 1.323 grams / 20.5grains.



HATSAN PCP AIR RIFLES



HATSAN
ARMS COMPANY

Izmir - Ankara Karayolu 26. km. No. 289 OSB Kemalpaşa, 35170 Izmir - TURKEY
Tel: +90 (232) 878 91 00 • Fax: + 90 (232) 878 91 02 - 878 97 23
www.hatsan.com.tr • info@hatsan.com.tr